2-fold common mode RFI suppression chokes with NANOPERM® cores

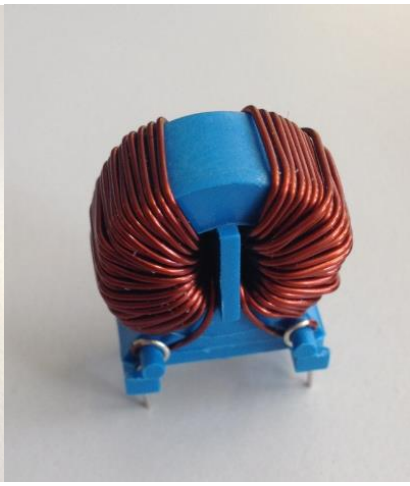
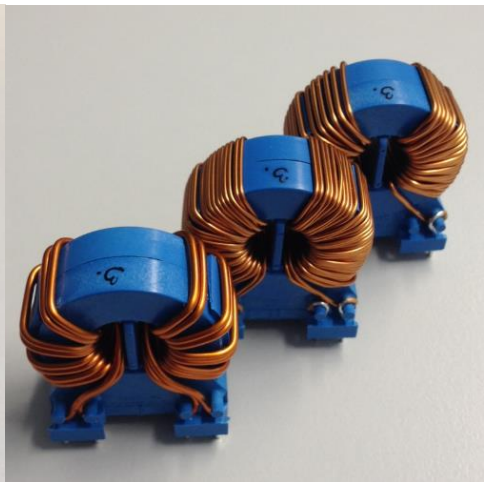

Types	Inom free convec tionon	Inom' forced cooling	Isat* /mA	Lnom @ 10kHz /[mH]	Ls/ µH	Rcu/ mΩ	Pin- Ø/mm	style	Dimensions W x D x H [mm]
MB-690	2	2,8	13	2 x 20,0	~ 19	< 85	0,7	flat	22,6 x 22,2 x 12,7
MB-631	3	4	17	2 x 11,5	~ 11	< 40	0,7	flat	22,6 x 22,2 x 12,7
MB-694	3	4	20	2 x 11,0	~ 10	< 40	0,56	upright	22 x 12,3 x 25
MB-602	4	5,5	15	2 x 75,0	~ 55	< 65	0,8	upright	34 x 19 x 35,5
MB-618	4,5	6	25	2 x 5,0	~ 8	< 23	0,7	flat	22,6 x 22,2 x 12,7
MB-640	6	8	25	2 x 6,3	~ 6	< 22	0,71	upright	22 x 12,3 x 25
MB-606	7	10	25	2 x 30,0	~ 55	< 27	1,0	upright	34 x 19 x 35,5
MB-609	8	11	30	2 x 18,0	~ 13	< 17	2 x 0,8	upright	34 x 19 x 35,5
MB-039	8,5	12	120	2 x 35,0	~ 20	< 21	1,12	upright	34 x 19 x 35,5
MB-022	8,5	12	450	2 x 0,8	~ 4	< 8,5	1,0	upright	34 x 19 x 35,5
MB-603	10	14	40	2 x 12,0	~ 10	< 11	2 x 0,85	upright	34 x 19 x 35,5
MB-096	12	17	100	2 x 7,5	~ 30	< 12,1	1,4	upright	38,5 x23 x 40
MB-632	14	20	45	2 x 2,4	~ 3	< 8	0,9	upright	22 x 12,3 x 25
MB-184	16	22	80	2 x 3,0	~ 2,5	< 2,5	1,8	upright	30 x 20 x 30
MB-607	16	22	55	2 x 6,3	~ 5	< 6	2 x 1,12	upright	34 x 19 x 35,5
MB-605	18	25	80	2 x 3,0	~ 5	< 4	2 x 1,0	upright	34 x 19 x 35,5
MB-020	20	28	85	2 x 33,0	~ 12	< 8	2,0	upright	59 x 59 x 33,5
MB-615	22	30	110	2 x 1,6	~ 2	< 1,7	2 x 1,32	upright	34 x 19 x 35,5
MB-036	23	32	125	2 x 5,0	~ 12	< 2,8	2,5	flat	59 x 59 x 31
MB-608	26	36	185	2 x 0,6	~ 5	< 1,6	2 x 1,18	upright	34 x 19 x 35,5
MB-633	30	42	140	2 x 1,0	~ 0,8	< 1,2	2 x 1,5	upright	34 x 19 x 35,5
MB-740**	40	56	485	2 x 4,5	~ 3,9	< 1,85	2,5	flat	52 x 52 x 32

For all information no liability assumed; *Saturation Current Isat of NANOPERM®: Peak value of the exiting current when the initial inductance level is dropped to 10 per cent, see www.magnetic.de;**: preliminary

Environment temperature of 70°C, at another environment temperature, the new nom. current can be estimated acc. to the derating theory: http://www.magnetec.de/fileadmin/pdf/derating.pdf. Overtemperature needs to be checked in the application. At forced cooling, double Rth value is assumed.

www.magnetec.de

MAGNETEC GmbH
Industriestrasse 7, D-63505 Langenselbold, Germany
Fon: +49 6184 9202-0 / Fax: +49 6184 9202-20 / E-Mail: magnetec@magnetec.de

® MAGNETEC, NANOPERM®: Registered trademark of MAGNETEC GmbH

2-fold common mode RFI suppression chokes with NANOPERM® cores

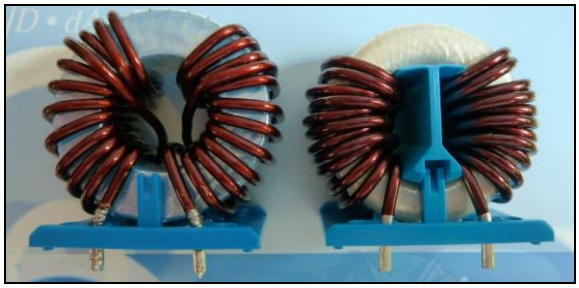

Choke Parameters:
Core: 40 x 25 x 15 mm
2 x 12 turns. Ø 2,4 mm
2 x 1,7 mH, 22A
Rcu = 2 x 2.8 mΩ

Example characteristics in comparison with Ferrite chokes:

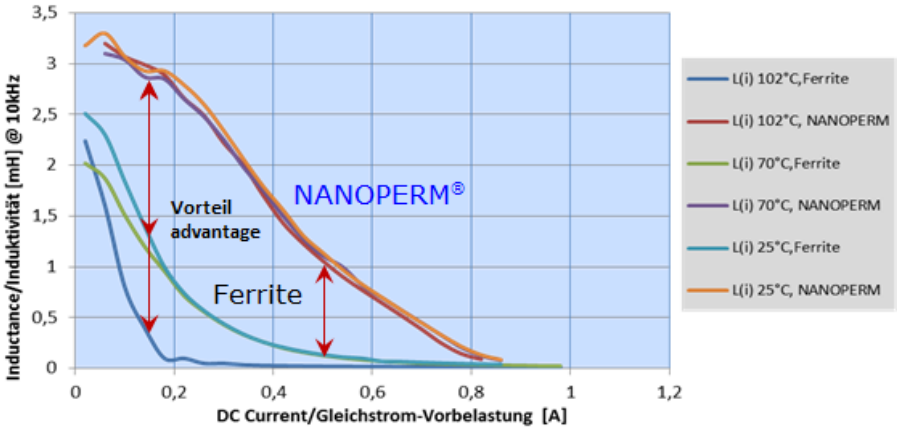

With the same core size NANOPERM® offers significantly better saturation performance and is temperature resistant

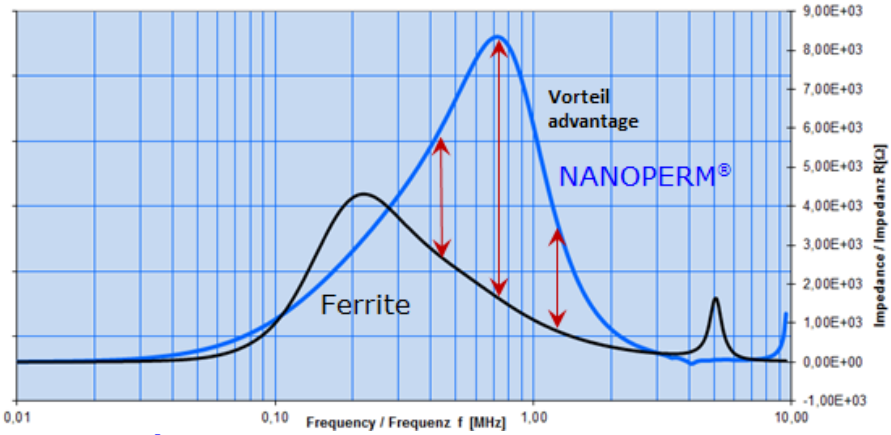

With the same core size NANOPERM® offers significantly improved attenuation levels up to the MHz range
For typical impedances vs. frequency, please visit www.magentec.de.

Our Chokes are based on tape wound cores based on the nanocrystalline softmagnetic material **NANOPERM®**. Compared to chokes made of ferrite cores, the following benefits are achieved:

- **High impedance and better EMI suppression**
- **Higher saturation flux density**
- **Less temperature sensitive**
- **higher max. component temp (130°C)**

Chokes are available for the nominal current range from 2–40 Amps, designed acc. to EN60938-1. Operating temperature range: -40...+70°C. The plastic materials fulfill UL-94 V0 and are UL listed.

www.magnetec.de

MAGNETEC GmbH
Industriestrasse 7, D-63505 Langenselbold, Germany
Fon: +49 6184 9202-0 / Fax: +49 6184 9202-20 / E-Mail: magnetec@magnetec.de

® MAGNETEC, NANOPERM®: Registered trademark of MAGNETEC GmbH