

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent.

Client:	MAGNETEC	Magnetec P/N:	M-012		
Client's P/N:	/	PS Index:	05	PS Revision:	07
Subject:	EMC Wandler				

1. Mechanical Outline

Nominal equivalent round core:

60 x 40 x 15


Finished product dimensions:

OD ≤ **62,3**

ID ≥ **37,1**

H ≤ **17,3**

[dimensions] = mm

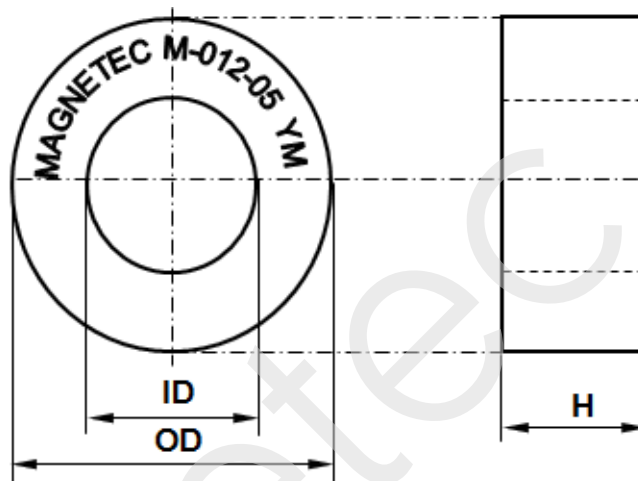

2. Core data (nominal values)

Core material:	NANOPERM®	$L_{Fe} = 15,5 \text{ cm}$	$A_{Fe} = 1,13 \text{ cm}^2$
Permeability level:	ca. 30.000	@ frequency 10 kHz	@ H peak 3,0 mA/cm

3. Inspection values (at room temperature, unless otherwise stated)

Measured value	Measurement limits	Frequency	$I_{eff} \times N$ [mA x turn]
AL [μH]	19,2 - 38,3	10 kHz	33
AL [μH]	11,5 - NA	100 kHz	33

4. Core finishing

Type:	Epoxy coated
Marking:	MAGNETEC M-012-05 YM (YM = Year/Month), acc. to IEC 60062 6.1.1
Packaging:	10 pcs. per layer; 5 layers per carton box; PU = 50 pcs.

5. Comments

Visit http://www.magnetec.de/fileadmin/pdf/pb_ds.pdf for further information.

Index / Revision	Alteration	Date
05 / 03	Product Specification	27.10.2000
05 / 04	PU = 60 pcs.	25.03.2004
05 / 05	LN format, AL = 19,2 - 38,3μH @ 10kHz; PU = 50 pcs.	17.10.2012
05 / 06	Define 100kHz lower limit	27.08.2014
05 / 07	100 kHz lower limit increased	09.10.2018

Created:	Z. Palánki	Approved (Techn):	F. Zámbořský	Approved (Quality):	R. Montvai	Released:	P. Seiz
	09.10.2018		13.11.2018		25.10.2018		19.11.2018

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent. Disclosing the specification to third parties or using its content without written permission from MAGNETEC is strictly forbidden and every offender is liable to pay the corresponding damages.