

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent.

Client:	MAGNETEC	Magnetec P/N:	M-699		
Client's P/N:		PS Index:	01	PS Revision:	02
Subject:	EMV Wandler				

1. Mechanical Outline

Nominal equivalent round core:

30 x 20 x 10


Finished product dimensions:

OD ≤ 33,0

ID ≥ 17,5

H ≤ 12,8

[dimensions] = mm

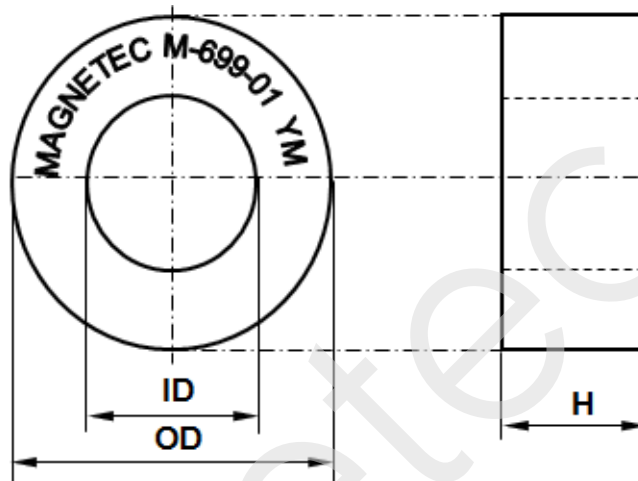

2. Core data (nominal values)

Core material:	NANOPERM®	$L_{Fe} = 7,75 \text{ cm}$	$A_{Fe} = 0,38 \text{ cm}^2$
Permeability level:	ca. 90.000	@ frequency 10 kHz	@ H peak 3,65 mA/cm

3. Inspection values (at room temperature, unless otherwise stated)

Measured value	Measurement limits	Frequency	$I_{eff} \times N$ [mA x turn]
AL [μH]	40 - 80	10 kHz	20
AL [μH]	10 - NA	100 kHz	20

4. Core finishing

Type:	Boxed in temperature resistive case (155°C)
Marking:	MAGNETEC M-699-01 YM (YM = Year/Month), acc. to IEC 60062 6.1.1
Packaging:	35 pcs. per layer; 6 layers per carton box; PU = 210 pcs.

5. Comments

Visit http://www.magnetec.de/fileadmin/pdf/pb_ds.pdf for further information.

Index / Revision	Alteration	Date
01 / 01	Product Specification	27.08.2012
01 / 02	100 kHz lower limit defined	12.02.2015

Created:	Z. Palánki 12.02.2015	Approved (Techn):	F. Zámboreszky 01.06.2015	Approved (Quality):	J. Gulyás 01.06.2015	Released:	T. Trupp 01.06.2015
----------	--------------------------	-------------------	------------------------------	---------------------	-------------------------	-----------	------------------------

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent. Disclosing the specification to third parties or using its content without written permission from MAGNETEC is strictly forbidden and every offender is liable to pay the corresponding damages.