

### 3-fold common mode NANOPERM® chokes



Types	Inom free convection	Inom' forced cooling	Isat* /mA	Ln @ 10 kHz [mH]	Ls [μH]	Rcu [mΩ]	Pin Ø [mm]	H x B x T [mm]	Design
<b>MB-074</b> <sup>1</sup>	3,5	5	80	3 x 6	~ 20	< 40	0,8	38 x 36 x 21	upright
<b>MB-049</b> <sup>1</sup>	5	7	60	3 x 8	~ 60	< 36	1,12	42 x 42 x 27	flat
<b>MB-185</b>	8	11	40	3 x 19	~20	<20	1,12	48x48x26	flat
<b>MB-650</b> <sup>1</sup>	10	14	110	3 x 11	~ 56	< 15	1,6	60 x 60 x 29	flat
<b>MB-188</b>	8,5	12	80	3 x 12	~12	<13	1,18	ca.45x45x25	flat
<b>MB-687</b>	12	17	450	3 x 2,5	~ 7	< 9	1,25	47,5 x 47 x 26	upright
<b>MB-051</b>	12	17	150	3 x 5	~25	<8,6	1,8	59x59x27	flat
<b>MB-652</b>	17	24	300	3 x 3	~ 30	< 7,9	1,8	69 x 69 x 29,5	flat
<b>MB-637</b>	14	20	80	3 x 4,4	~ 12	< 5,5	1,4	48,5 x 48,5 x 26	flat
<b>MB-540</b> <sup>1</sup>	15	20	85	3 x 15	~ 16	< 7,0	1,8	59,5 x 59,5 x36,5	flat
<b>MB-617</b>	16	22	90	3 x 11	~ 9	< 6	1,8	52x52x34	flat
<b>MB-114</b>	18	25	260	3 x 7	~35	<5	2,5	75x75x33	flat
<b>MB-634</b>	20	28	400	3 x 1,7	~ 14	< 4,85	2,0	60 x 30 x 60	upright
<b>MB-427</b>	20	28	4760	3x0,31	~8	<2,6	2,5	99,5x99,5x38	flat
<b>MB-653</b>	22	31	270	3 x 4	~ 19	< 4,8	2,24	69 x 69 x 37	flat
<b>MB-157</b>	25	35	300	3 x 6,2	~ 22	< 5,5	2,36	75 x 75 x 34	flat
<b>MB-043</b>	22	31	300	3 x 1,5	~8	< 2,6	2,5	60 x 60 x 30	flat
<b>MB-054</b>	27	38	300	3 x 3,2	~ 9	< 2,6	3,0	73 x 73 x 35	flat
<b>MB-367</b>	28	40	800	3 x 1,2	~ 0,7	< 1,8	3,0	70 x 45 x 70	upright
<b>MB-047</b>	30	42	350	3 x 4	~ 20	< 3,8	5,0	81 x 81 x 62	flat
<b>MB-691</b>	35	50	150	3 x 3	~ 4	< 1,6	2,5	60 x 60 x 34	flat
<b>MB-426</b>	45	64	6660	3 x 0,16	~4,5	<0,95	2x2,5	99,5x99,5x38	flat
<b>MB-656</b> <sup>1</sup>	60	85	450	3 x 3,5	~ 17	< 1,35	2x3,35	115 x 115 x 50	flat
<b>MB-657</b> <sup>1</sup>	100	140	500	3 x 2,5	~ 10	< 0,85	11,5	130 x 130 x 55	flat
<b>MB-058</b> <sup>1</sup>	160	225	1200	3 x 2	~ 10	< 0,5	22,5	158 x 158 x 75	flat

For all information no liability assumed.

\*Saturation Current Isat of NANOPERM®: Peak value of the exiting current when the initial inductance level is dropped to 10 per cent, see [www.magnetec.de](http://www.magnetec.de). <sup>1</sup>preliminary

Overtemperature needs to be checked in the application. Environment temperature usually at 70°C, see datasheets, at another environment temperature, the new nom. current can be estimated acc. to the derating theory: <http://www.magnetec.de/fileadmin/pdf/derating.pdf>. In forced cooling condition, double Rth value is assumed.

[www.magnetec.de](http://www.magnetec.de)

#### MAGNETEC GmbH


Industriestrasse 7, D-63505 Langenselbold, Germany

Fon: +49 6184 9202-0 / Fax: +49 6184 9202-20 / E-Mail: [magnetec@magnetec.de](mailto:magnetec@magnetec.de)

### 3-fold common mode NANOPERM® chokes

Example choke – weight and size comparison Ferrite vs. NANOPERM® choke

Diff. example choke - performance comparison of a NANOPERM® choke vs. Ferrite based choke

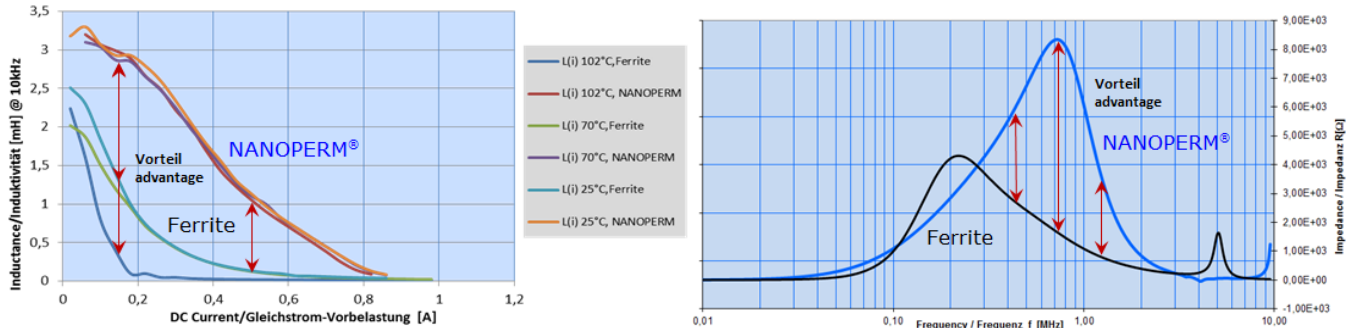

With the same core size NANOPERM® offers significantly improved attenuation levels up to the MHz range  
For typical impedances vs. frequency charts, please visit [www.magnetec.de](http://www.magnetec.de).

Our Chokes are based on tape wound cores based on the nanocrystalline softmagnetic material **NANOPERM®**. Compared to chokes made of ferrite cores, the following benefits are achieved:

- **High impedance and advanced EMI suppression**
- **Higher saturation flux density**
- **Less temperature sensitive**
- **higher max. component temp (130°C)**

Chokes are available for the nominal current range from 3,5 – 160 Amps, designed acc. to EN60938-1.

The plastic materials fulfill UL-94 V0 and are UL listed.

[www.magnetec.de](http://www.magnetec.de)

#### MAGNETEC GmbH

Industriestrasse 7, D-63505 Langenselbold, Germany

Fon: +49 6184 9202-0 / Fax: +49 6184 9202-20 / E-Mail: [magnetec@magnetec.de](mailto:magnetec@magnetec.de)