


Product specification for Inductive Components

Form: Revision: MF04.07 (F190)

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC 's prior written consent.

Client:	MAGNETEC	Magnetec P/N:	MB-039		
Client's p/n:	/	P\$ Index:	04	PS Revision:	09
Subject:	EMC Component				

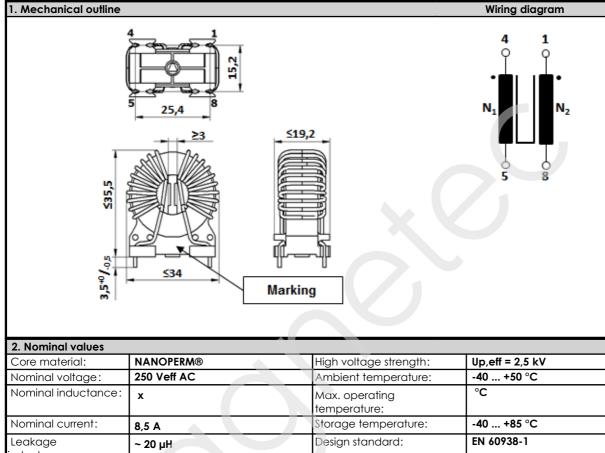

Nominal voltage:	250 Veff AC	Ambient temperature:	-40 +50 °C
Nominal inductance:	x	Max. operating temperature:	°C
Nominal current:	8,5 A	Storage temperature:	-40 +85 °C
Leakage inductances:	~ 20 µH	Design standard:	EN 60938-1
No. of turns:	N1 = N2 = 22	Wire diameter:	1,12 mm
Comments:			
3. Inspection values (at	room temperature, unless otherwise st	ated)	

3. Inspection values (at room temperature, unless otherwise stated)				
Measured value	Measuring limits	Measuring	easuring configurations	
Inductivity L1; L2 [mH]	25 - 44	f = 10 kHz	leff = 1 mA	
Wire resistance Rcu1; Rcu2 [mOhms]	0 - 21	RT = 25°C		
HV strength between N1 and N2 / liso<1mA	OK - NOK	Up,eff = 2,5 kV		
	-			
	-			

4. Others				
Marking:	ng: MAGNETEC MB-039-04 YM (YM = Year/Month), acc. to IEC 60062 6.1.1			
Packaging:	21 pcs. per layer, 4 layers per carton box; PU = 84 pcs.			
Comments:	Visit http://www.magnetec.de/fileadmin/pdf/pb ds.pdf for further information.			

Index / Rev.	Alteration	Date
02 / 04	Rcu1 = Rcu2 <= 21 mOhms	07.04.2002
03 / 05	RoHS conform; L1 = L2 = 6,5mH - 11,6mH @ 100kHz	24.10.2005
03 / 06	New format	22.05.2007
04 / 07	10 kHz measuring point added, depth changed in acc. with the drawing	17.07.2015
04 / 08	Packaging change	30.09.2016
04 / 09	Removing of 100 kHz inspection value	23.08.2021

Created:	E. Celan	Approved	A. Osipov	Approved	V. Coceban	Released:	B. Kessler
	2021.08.23	(Techn):	2021.12.10	(Quality):	20.09.2021		10.12.2021