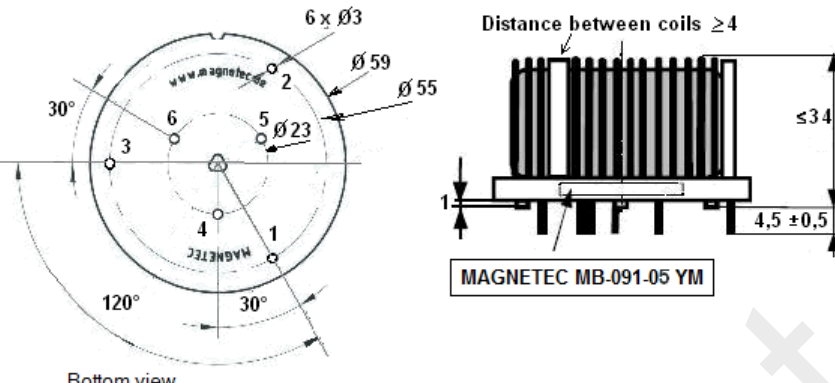



CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent.

Client:	MAGNETEC	Magnetec P/N:	MB-091		
Client's p/n:	/	PS Index:	05	PS Revision:	02
Subject:	EMC Component				

1. Mechanical outline	Wiring diagram
 Bottom view Pinning tolerance +/-0,3 mm	

2. Nominal values			
Core material:	NANOPERM®	High voltage strength:	Up,eff = 2,5 kV
Nominal voltage:	440 Veff AC	Ambient temperature:	-40 ... +60 °C
Nominal inductance:	3 x 3,2 mH	Max. operating temperature:	°C
Nominal current:	30 A	Storage temperature:	-40 ... +85 °C
Leakage inductances:	ca. 3 µH	Design standard:	EN 60938-1
No. of turns:	N1 = N2 = N3 = 6	Wire diameter:	2,5 mm
Comments:			

3. Inspection values (at room temperature, unless otherwise stated)			
Measured value	Measuring limits	Measuring configurations	
Inductivity L1; L2; L3 [mH]	2,2 - 5,5	f = 10 kHz	I _{eff} = 4 mA
Wire resistance R _{cu1} ; R _{cu2} ; R _{cu3} [mOhms]	NA - 1,8	RT = 25°C	
HV strength between N1; N2; N3 / I _{iso} <1mA	OK - NOK	U _{p,eff} = 2,5 kV	t = 2 s
	-		
	-		

4. Others	
Marking:	MAGNETEC MB-091-05 YM (YM = Year/Month), acc. to IEC 62 5.1
Packaging:	8 pcs. per layer, 4 layers per carton box; PU = 32 pcs.
Comments:	Visit http://www.magnetec.de/fileadmin/pdf/pb_ds.pdf for further information.

Index / Rev.	Alteration	Date
04 / 01	Product Specification	08.08.2011
05 / 02	Choke pinning changed	30.11.2011

Created:	Zs. Eperjesi	Approved (Techn):	F. Zámboreszky	Approved (Quality):	J. Gulyás	Released:	F. Rauscher
	30.11.2011		05.12.2011		12.12.2011		05.12.2011

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent. Disclosing the specification to third parties or using its content without written permission from MAGNETEC is strictly forbidden and every offender is liable to pay the corresponding damages.