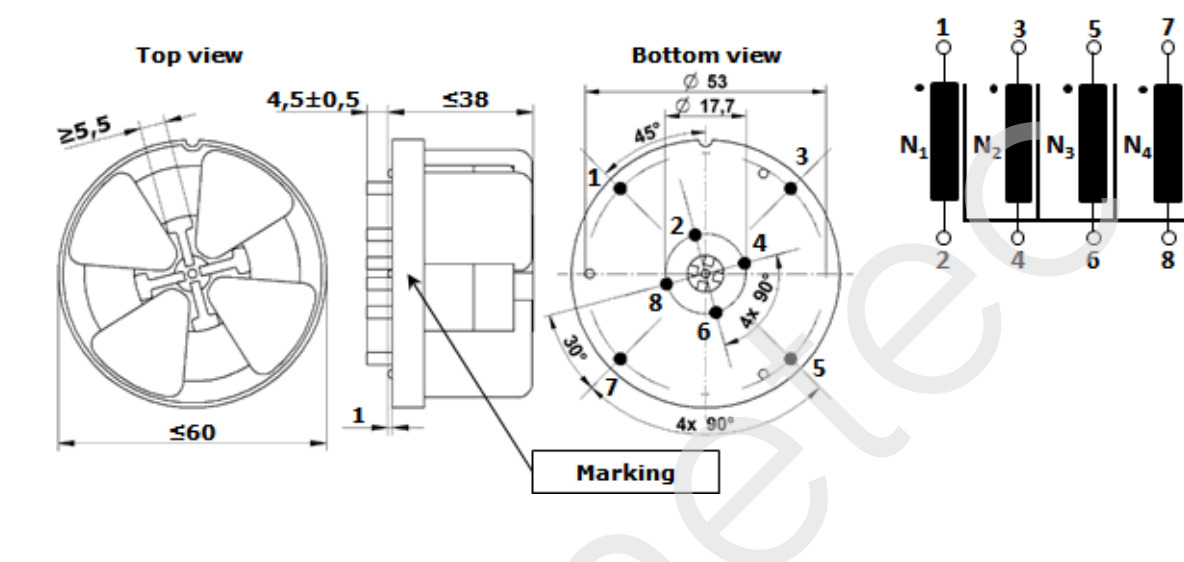


CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent.

Client:	MAGNETEC	Magnetec P/N:	MB-397		
Client's p/n:	/	PS Index:	02S	PS Revision:	02
Subject:	EMC Component				
Preliminary datasheet: This document is strictly confidential! It is subject to change without prior notice!					

1. Mechanical outline	Wiring diagram
	

2. Nominal values			
Core material:	NANOPERM®	High voltage strength:	Up,eff = 2,5 kV
Nominal voltage:	600 Veff AC	Ambient temperature:	-40 ... +70* °C
Nominal inductance:	4 x 1,7 mH	Max. operating temperature:	°C
Nominal current:	40 A	Storage temperature:	-40 ... +85 °C
Leakage inductances:	1,6 µH	Design standard:	
No. of turns:	N1 = N2 = N3 = N4 = 4	Wire diameter:	2,8 mm
Comments:			

3. Inspection values (at room temperature, unless otherwise stated)			
Measured value	Measuring limits	Measuring configurations	
Inductivity L1; L2; L3; L4 [mH]	1,08 - 2,41	f = 10 kHz	Ieff=6 mA
Inductivity L1; L2; L3; L4 [mH]	0,25 - NA	f = 100 kHz	Ieff=6 mA
Wire resistance Rcu1; Rcu2; Rcu3; Rcu4 [mOhms]	0 - 0,97	T = 25°C	
HV strength between N1; N2; N3; N4 / Iiso<1mA	OK - NOK	Up,eff = 2,5kV	t = 2s
	-		

4. Others	
Marking:	MAGNETEC MB-397-02 YM SAMPLE (YM = Year/Month), acc. to IEC 60062 6.2.1
Packaging:	pcs. per layer, layers per carton box; PU = pcs.
Comments:	Visit http://www.magnetec.de/fileadmin/pdf/pb_ds.pdf for further information.

Index / Rev.	Alteration	Date
02S / 02	Sample	29.07.2015

Created:	Z. Palánki	Approved (Techn):		Approved (Quality):		Released:	
	29.07.2015						

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent. Disclosing the specification to third parties or using its content without written permission from MAGNETEC is strictly forbidden and every offender is liable to pay the corresponding damages.