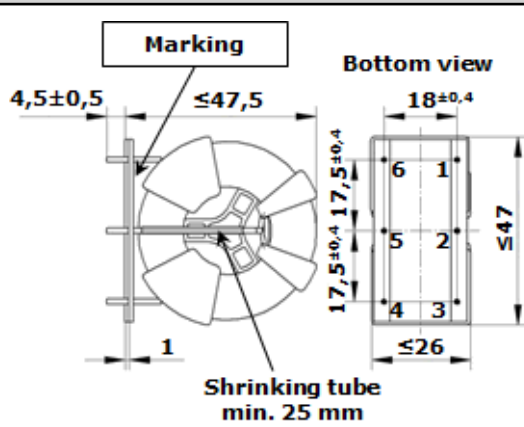



CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent.

Client:	MAGNETEC	Magnetec P/N:	MB-687		
Client's p/n:	/	PS Index:	01	PS Revision:	01
Subject:	EMC Component				

1. Mechanical outline	Wiring diagram
 Marking Bottom view Shrinking tube min. 25 mm	

2. Nominal values			
Core material:	NANOPERM®	High voltage strength:	Up,eff = 2,5 kV
Nominal voltage:	480 Veff AC	Ambient temperature:	-40 ... +70 °C
Nominal inductance:	3 x 2,5 mH	Max. operating temperature:	°C
Nominal current:	12 A	Storage temperature:	-40 ... +85 °C
Leakage inductances:	ca. 7,1 µH	Design standard:	EN 60938-1
No. of turns:	N1 = N2 = N3 = 9	Wire diameter:	1,25 mm
Comments:			

3. Inspection values (at room temperature, unless otherwise stated)			
Measured value	Measuring limits	Measuring configurations	
Inductivity L1; L2; L3 [mH]	1,62 - 3,62	f = 10 kHz	Ueff = 0,1 V
Inductivity L1; L2; L3 [mH]	1,08 - NA	f = 100 kHz	Ueff = 0,1 V
Wire resistance Rcu1; Rcu2; Rcu3 [mOhms]	0 - 9	T = 23±3°C	t = 2 s
HV strength between N1; N2; N3 / Iiso<1mA	OK - NOK	Ueff = 2,5 kV	
	-		

4. Others	
Marking:	MAGNETEC MB-687-01 YM (YM = Year/Month), acc. to IEC 60062 6.1.1
Packaging:	12 pcs. per layer, 4 layers per carton box; PU = 48 pcs.
Comments:	Visit http://www.magnetec.de/fileadmin/pdf/pb_ds.pdf for further information.

Index / Rev.	Alteration	Date
01 / 01	First issue	30.06.2016

Created:	M. Pádár	Approved (Techn):	F. Zámboreszky	Approved (Quality):	L. Ferencz	Released:	P. Seiz
	30.06.2016		12.09.2016		12.09.2016		16.09.2016

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent. Disclosing the specification to third parties or using its content without written permission from MAGNETEC is strictly forbidden and every offender is liable to pay the corresponding damages.