

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent.

Client:	MAGNETEC	Magnetec P/N:	M-039		
Client's P/N:	/	PS Index:	01	PS Revision:	04
Subject:	EMC Wandler				

1. Mechanical Outline

Nominal equivalent round core:

40 x 25 x 15


Finished product dimensions:

OD ≤ 41,8

ID ≥ 23,2

H ≤ 17,2

[dimensions] = mm

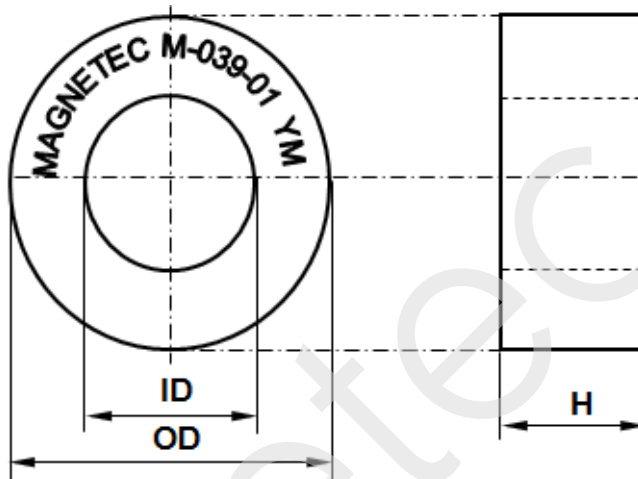

2. Core data (nominal values)

Core material:	NANOPERM®	$L_{Fe} = 10,03 \text{ cm}$	$A_{Fe} = 0,88 \text{ cm}^2$
Permeability level:	ca. 90 000	@ frequency 10 kHz	@ H peak 2,77 mA/cm

3. Inspection values (at room temperature, unless otherwise stated)

Measured value	Measurement limits	Frequency	$I_{eff} \times N$ [mA x turn]
AL [μH]	70 - 140	10 kHz	20
AL [μH]	16,1 - NA	100 kHz	20

4. Core finishing

Type:	Epoxy coated
Marking:	MAGNETEC M-039-01 YM (YM = Year/Month), acc. to IEC 60062 6.1.1
Packaging:	24 pcs. per layer; 4 layers per carton box; PU = 96 pcs.

5. Comments

Visit http://www.magnetec.de/fileadmin/pdf/pb_ds.pdf for further information.

Index / Revision	Alteration	Date
01 / 00	Product Specification	21.07.2000
01 / 01	PU = 120 pcs.	11.07.2006
01 / 02	New format	29.08.2007
01 / 03	PU changed	17.03.2014
01 / 04	Nominal permeability and 10kHz upper limit given, 100kHz lower limit defined	03.09.2014

Created:	Z. Palánki	Approved (Techn):	F. Zámboreszky	Approved (Quality):	J. Gulyás	Released:	T. Trupp
	03.09.2014		15.09.2014		15.09.2014		15.09.2014

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent. Disclosing the specification to third parties or using its content without written permission from MAGNETEC is strictly forbidden and every offender is liable to pay the corresponding damages.