

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent.

Client:	MAGNETEC	Magnetec P/N:	M-044		
Client's P/N:	/	PS Index:	03	PS Revision:	03
Subject:	EMC Wandler				

1. Mechanical Outline

Nominal equivalent round core:

45 x 30 x 20


Finished product dimensions:

OD ≤ 47,5

ID ≥ 28,0

H ≤ 22,2

[dimensions] = mm

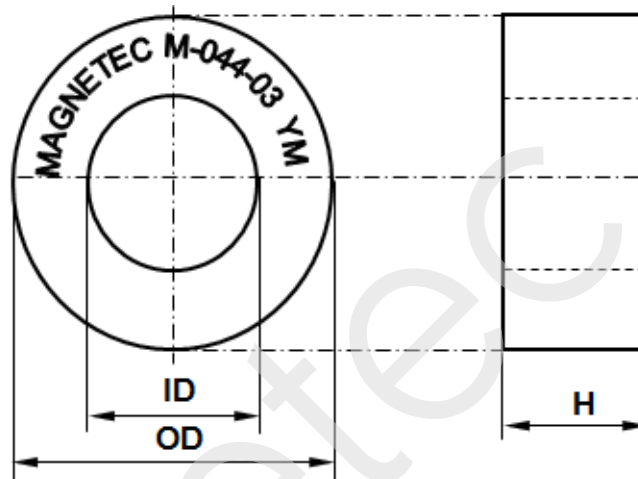

2. Core data (nominal values)

Core material:	NANOPERM®	$L_{Fe} = 11,8 \text{ cm}$	$A_{Fe} = 1,2 \text{ cm}^2$
Permeability level:	ca. 90 000	@ frequency 10 kHz	@ H peak 3,6 mA/cm

3. Inspection values (at room temperature, unless otherwise stated)

Measured value	Measurement limits	Frequency	$I_{eff} \times N$ [mA x turn]
AL [μH]	75 - 150	10 kHz	30
AL [μH]	18,7 - NA	100 kHz	30

4. Core finishing

Type:	Epoxy coated
Marking:	MAGNETEC M-044-03 YM (YM = Year/Month), acc. to IEC 60062 6.1.1
Packaging:	15 pcs. per layer; 4 layers per carton box; PU = 60 pcs.

5. Comments

Visit http://www.magnetec.de/fileadmin/pdf/pb_ds.pdf for further information.

Index / Revision	Alteration	Date
03 / 01	Product Spezifikation	26.03.2001
03 / 02	New format	05.11.2009
03 / 03	Nominal permeability and 10kHz upper limit given, 100kHz lower limit defined, power loss comment deleted	03.09.2014

Created:	Z. Palánki 03.09.2014	Approved (Techn):	F. Zámboreszky 16.09.2014	Approved (Quality):	J. Gulyás 16.09.2014	Released:	T. Trupp 16.09.2014
----------	--------------------------	-------------------	------------------------------	---------------------	-------------------------	-----------	------------------------

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent. Disclosing the specification to third parties or using its content without written permission from MAGNETEC is strictly forbidden and every offender is liable to pay the corresponding damages.