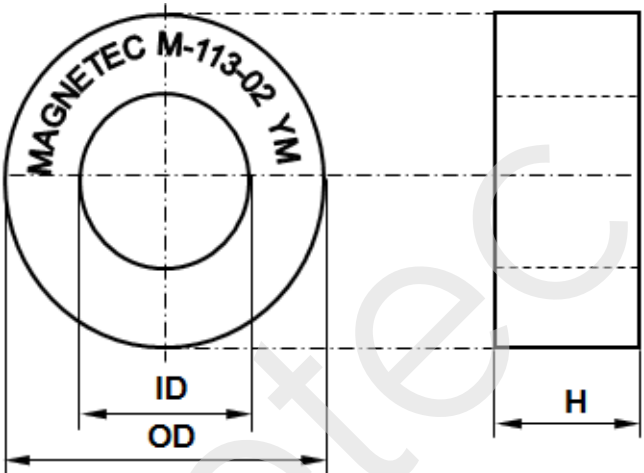


CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent.

Client:	MAGNETEC	Magnetec P/N:	M-113		
Client's P/N:	/	PS Index:	02	PS Revision:	03
Subject:	EMC Wandler				

1. Mechanical Outline	
Nominal equivalent round core: 80 x 63 x 30 Finished product dimensions: OD ≤ 85,0 ID ≥ 57,0 H ≤ 35,5 [dimensions] = mm	

2. Core data (nominal values)			
Core material:	NANOPERM®	$L_{Fe} = 22,36 \text{ cm}$	$A_{Fe} = 1,86 \text{ cm}^2$
Permeability level:	ca. 30 000	@ frequency 10 kHz	@ H peak 3,16 mA/cm

3. Inspection values (at room temperature, unless otherwise stated)			
Measured value	Measurement limits	Frequency	leff x N [mA x turn]
AL [μH]	24,1 - 48,2	10 kHz	50
AL [μH]	12 - NA	100 kHz	50

4. Core finishing	
Type:	Cased
Marking:	MAGNETEC M-113-02 YM (YM = Year/Month), acc. to IEC 60062 6.1.1
Packaging:	6 pcs. per layer; 2 layers per carton box; PU = 12 pcs.

5. Comments
Visit http://www.magnetec.de/fileadmin/pdf/pb_ds.pdf for further information.

Index / Revision	Alteration	Date
02 / 01	Product spezification; Moulded case	15.06.2005
02 / 02	PU = 12 pcs	17.07.2007
02 / 03	100kHz lower limit defined	10.05.2014

Created:	Z. Palánki 10.05.2014	Approved (Techn):	F. Záborszky 23.05.2014	Approved (Quality):	J. Gulyás 23.05.2014	Released:	T. Trupp 23.05.2014
-----------------	--------------------------	--------------------------	----------------------------	----------------------------	-------------------------	------------------	------------------------

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent. Disclosing the specification to third parties or using its content without written permission from MAGNETEC is strictly forbidden and every offender is liable to pay the corresponding damages.