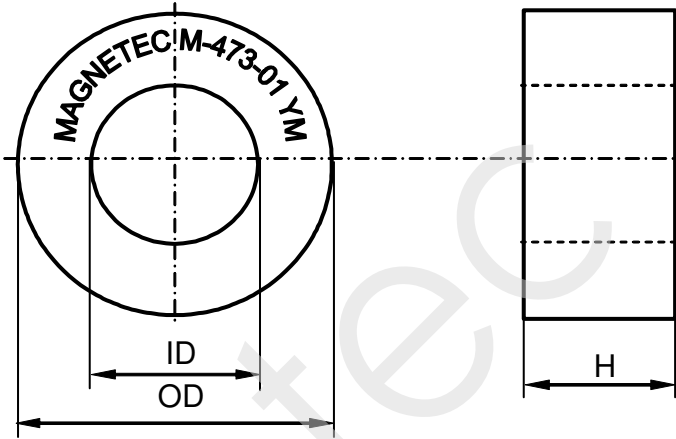


CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent.

Client:	MAGNETEC GmbH	Magnetec P/N:	M-473		
Client's P/N:	/	PS Index:	01	PS Revision:	01
Subject:	CT Wandler				

1. Mechanical Outline	
Nominal equivalent round core: 36 x 24 x 15 Finished product dimensions: OD ≤ 38,0 ID ≥ 21,5 H ≤ 17,0 [dimensions] = mm	

2. Core data (nominal values)			
Core material:	NANOPERM®	$L_{Fe} = 9,23 \text{ cm}$	$A_{Fe} = 0,70 \text{ cm}^2$
Permeability level:	ca. 110.000	@ frequency 50 Hz	@ H peak 3,22 mA/cm

3. Inspection values (at room temperature, unless otherwise stated)			
Measured value	Measurement limits	Frequency	leff x N [mA x turn]
AL [μH]	71 - NA	50 Hz	21

4. Core finishing	
Type:	Epoxy coated
Marking:	MAGNETEC M-473-01 YM
Packaging:	24 pcs. per layer; 5 layers per carton box; PU = 120 pcs.

5. Comments
Visit http://www.magnetec.de/fileadmin/pdf/pb_ds.pdf for further information.

Index / Revision	Alteration	Date
01 / 01	Product Specification	11.05.2009

Created:	Zs. Sándor 11.05.2009	Approved (Techn):	F. Zámbořszky 12.05.2009	Approved (Quality):	V. Káposztas 13.05.2009	Released:	F. Rauscher 13.05.2009
-----------------	--------------------------	--------------------------	-----------------------------	----------------------------	----------------------------	------------------	---------------------------

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent. Disclosing the specification to third parties or using its content without written permission from MAGNETEC is strictly forbidden and every offender is liable to pay the corresponding damages.