

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent.

Client:	MAGNETEC	Magnetec P/N:	M-676		
Client's P/N:	/	PS Index:	01	PS Revision:	02
Subject:	EMC Wandler				

1. Mechanical Outline

Nominal equivalent round core:

160 x 130 x 30


Finished product dimensions:

OD \leq 165,2

ID \geq 122,8

H \leq 35,0

[dimensions] = mm

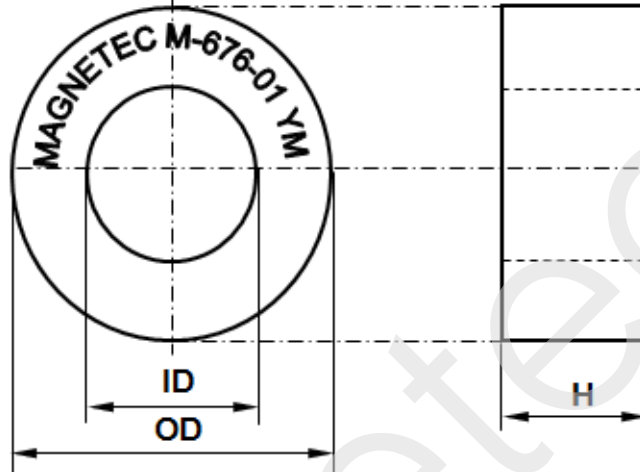

2. Core data (nominal values)

Core material:

NANOPERM®

$L_{Fe} = 44,98 \text{ cm}$

$A_{Fe} = 3,50 \text{ cm}^2$

Permeability level:

2.000

@ frequency

10 kHz

@ H peak

3 mA/cm

3. Inspection values (at room temperature, unless otherwise stated)

Measured value	Measurement limits	Frequency	I _{eff} x N [mA x turn]
AL [μH]	1,37 - 2,73	10 kHz	95
AL [μH]	1,37 - 2,73	100 kHz	95

4. Core finishing

Type:

Cased

Marking:

MAGNETEC M-676-01 YM

Packaging:

1 pcs. per layer; 5 layers per carton box; PU = 5 pcs.

5. Comments

Visit http://www.magnetec.de/fileadmin/pdf/pb_ds.pdf for further information.

Index / Revision	Alteration	Date
01 / 01	Product Specification	16.12.2010
01 / 02	Harmonization of part and finished product dimensions	16.01.2020

Created:	Z. Braxátor 16.01.2020	Approved (Techn):	F. Zámbořszky 16.01.2020	Approved (Quality):	G. Zsák 16.01.2020	Released:	B. Kessler 16.01.2020
-----------------	---------------------------	--------------------------	-----------------------------	----------------------------	-----------------------	------------------	--------------------------

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent. Disclosing the specification to third parties or using its content without written permission from MAGNETEC is strictly forbidden and every offender is liable to pay the corresponding damages.