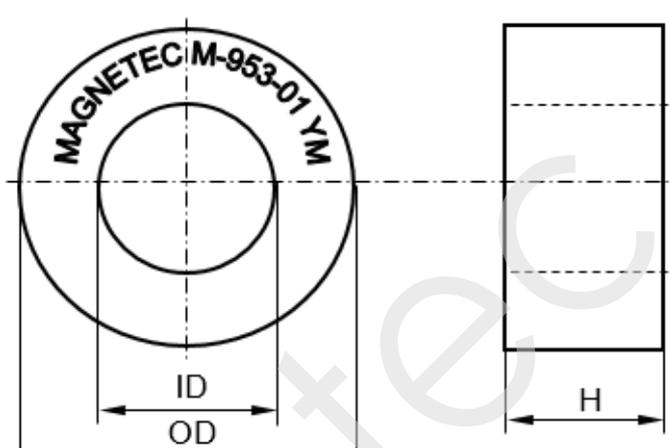


CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent.

Client:	MAGNETEC	Magnetec P/N:	M-953		
Client's P/N:	/	PS Index:	01	PS Revision:	01
Subject:	EMC Wandler				

1. Mechanical Outline	
Nominal equivalent round core: 80 x 63 x 30 Finished product dimensions: OD ≤ 86,0 ID ≥ 56,0 H ≤ 36,0 [dimensions] = mm	

2. Core data (nominal values)			
Core material:	NANOPERM®	$L_{Fe} = 22,21 \text{ cm}$	$A_{Fe} = 1,90 \text{ cm}^2$
Permeability level:	8 000	@ frequency 10 kHz	@ H peak 3 mA/cm

3. Inspection values (at room temperature, unless otherwise stated)			
Measured value	Measurement limits	Frequency	leff x N [mA x turn]
AL [μH]	6,02 - 12,02	10 kHz	47
AL [μH]	5,12 - NA	100 kHz	47

4. Core finishing	
Type:	Cased
Marking:	MAGNETEC M-953-01 YM (YM = Year/Month), acc. to IEC 60062 6.1.1
Packaging:	6 pcs. per layer; 2 layers per carton box; PU = 12 pcs.

5. Comments	
Case material: Ultramid A3X2G5	
Adhesive tape: Vonroll 54113 or CMC 10966 Visit http://www.magnetec.de/fileadmin/pdf/pb_ds.pdf for further information.	

Index / Revision	Alteration	Date
01 / 01	Product Specification	22.09.2014

Created:	Zs. Sándor 22.09.2014	Approved (Techn):	F. Zámboreszky 25.09.2014	Approved (Quality):	J. Gulyás 25.09.2014	Released:	T. Trupp 25.09.2014
-----------------	--------------------------	--------------------------	------------------------------	----------------------------	-------------------------	------------------	------------------------

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent. Disclosing the specification to third parties or using its content without written permission from MAGNETEC is strictly forbidden and every offender is liable to pay the corresponding damages.