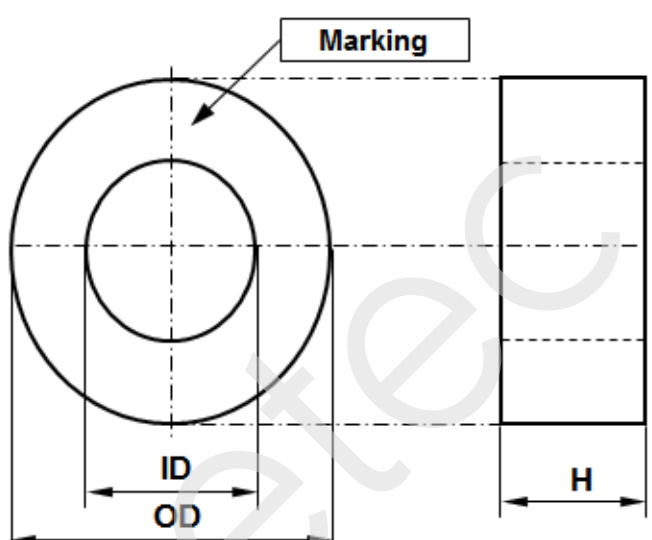


CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent.

Client:	MAGNETEC	Magnetec P/N:	M-988		
Client's P/N:	/	PS Index:	01	PS Revision:	01
Subject:	EMC Wandler				

1. Mechanical Outline	
Nominal equivalent round core: 63,5 x 51 x 25 Finished product dimensions: OD ≤ 65,5 ID ≥ 48,0 H ≤ 27,3 [dimensions] = mm	

2. Core data (nominal values)			
Core material:	NANOPERM®	$L_{Fe} = 17,6 \text{ cm}$	$A_{Fe} = 1,12 \text{ cm}^2$
Permeability level:	90 000	@ frequency 10 kHz	@ H peak 3 mA/cm

3. Inspection values (at room temperature, unless otherwise stated)			
Measured value	Measurement limits	Frequency	$I_{eff} \times N$ [mA x turn]
AL [μH]	50 - 100	10 kHz	37
AL [μH]	16,4 - NA	100 kHz	37
PFe [W/core]	0 - 1,35	15 kHz	B_{max}=500mT

4. Core finishing	
Type:	Epoxy coated
Marking:	MAGNETEC M-988-01 YM (YM = Year/Month), acc. to IEC 60062 6.1.1
Packaging:	10 pcs. per layer; 3 layers per carton box; PU = 30 pcs.

5. Comments
Visit http://www.magnetec.de/fileadmin/pdf/pb_ds.pdf for further information.

Index / Revision	Alteration	Date
01 / 01	First issue	06.05.2015

Created:	Z. Palánki 06.05.2015	Approved (Techn):	F. Záborszky 09.06.2015	Approved (Quality):	J. Gulyás 09.06.2015	Released:	T. Trupp 09.06.2015
-----------------	--------------------------	--------------------------	----------------------------	----------------------------	-------------------------	------------------	------------------------

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent. Disclosing the specification to third parties or using its content without written permission from MAGNETEC is strictly forbidden and every offender is liable to pay the corresponding damages.