

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent.

Client:	MAGNETEC	Magnetec P/N:	M-062		
Client's P/N:	/	PS Index:	04	PS Revision:	04
Subject:	EMC Wandler				

1. Mechanical Outline

Nominal equivalent round core:

25,0 x 16,0 x 10,0


Finished product dimensions:

OD ≤ **28,0**

ID ≥ **13,2**

H ≤ **12,4**

[dimensions] = mm

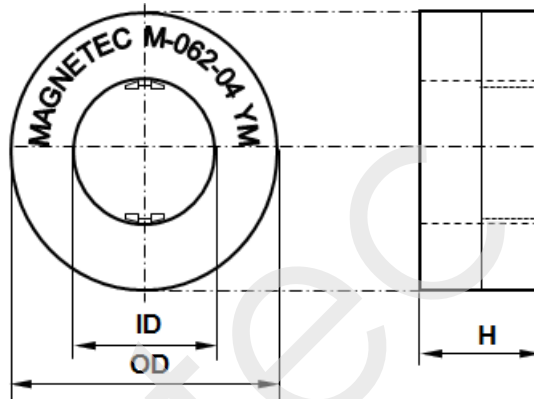

2. Core data (nominal values)

Core material:	NANOPERM®	$L_{Fe} = 6,34 \text{ cm}$	$A_{Fe} = 0,33 \text{ cm}^2$
Permeability level:	ca. 30 000	@ frequency 10 kHz	@ H peak 3,3 mA/cm

3. Inspection values (at room temperature, unless otherwise stated)

Measured value	Measurement limits	Frequency	$I_{eff} \times N$ [mA x turn]
AL [μH]	13,7 - 27,4	10 kHz	15
AL [μH]	6,8 - NA	100 kHz	15

4. Core finishing

Type:	Cased
Marking:	MAGNETEC M-062-04 YM (YM = Year/Month), acc. to IEC 60062 6.1.1
Packaging:	63 pcs. per layer; 6 layers per carton box; PU = 378 pcs.

5. Comments

Visit http://www.magnetec.de/fileadmin/pdf/pb_ds.pdf for further information.

Index / Revision	Alteration	Date
01 / 00	Product specification	09.04.2001
02 / 01	Case and PU changing	11.08.2004
03 / 02	AL = 16,0 - 31,0 μH	04.10.2004
04 / 03	New form; RoHS conform; AL = 13,7 - 27,4 μH	20.03.2007
04 / 04	100kHz lower limit defined	13.11.2014

Created:	Z. Palánki	Approved (Techn):	F. Zámboreszky	Approved (Quality):	J. Gulyás	Released:	T. Trupp
	13.11.2014		20.01.2015		20.01.2015		20.01.2015

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent. Disclosing the specification to third parties or using its content without written permission from MAGNETEC is strictly forbidden and every offender is liable to pay the corresponding damages.