


Product specification for inductive components

Form: Revision: MF04.05 (F108)

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC 's prior written consent.

Client:	MAGNETEC	Magnetec P/N:	M-1231		
Client's P/N:	/	PS Index:	01	PS Revision:	01
Subject:	EMC Wandler				

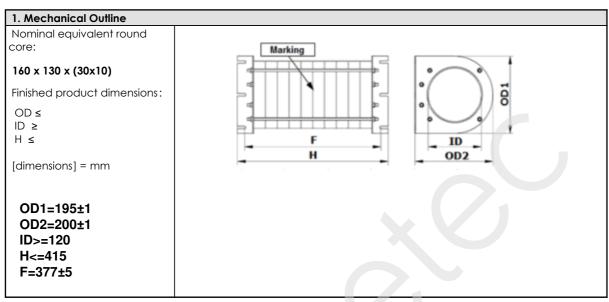

2. Core data (nominal values)				
Core material:	NANOPERM®	L _{Fe} = 45,08 cm	$A_{Fe} = 32.8 \text{ cm}^2$	
Permeability level:	/	@ frequency	@ H peak	

3. Inspection values (at room temperature, unless otherwise stated)					
Measured value	Measurement limits	Frequency	leff x N [mA x turn]		
AL [µH]	77 - 154	10 kHz	96		
AL [µH]	57 - NA	100 kHz	96		

4. Core finishing

Type: Tube of cased cores

Marking: see below

Packaging: 1 pcs. per layer; 1 layers per carton box; PU = 1 pcs.

5. Comments

Marking:

COOITUBE MAGNETEC M-1231-01 YM

YM = Year/Month acc. to IEC 60062 6.1.1 Visit http://www.magnetec.de/fileadmin/pdf/pb_ds.pdf for further information.

Index / Revision	Alteration	Date
01 / 01	First issue	08.06.2016

Created:	Zs. Sándor	Approved	F. Zámborszky	Approved	L. Ferencz	Released:	T. Trupp
	08.06.2016	(Techn):	08.08.2016	(Quality):	08.08.2016		08.08.2016

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent. Disclosing the specification to third parties or using its content without written permission from MAGNETEC is strictly forbidden and every offender is liable to pay the corresponding damages.