


## Product specification for inductive components

Form: Revision: MF04.05 (F108)

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC 's prior written consent.

Client:	MAGNETEC GmbH	Magnetec P/N:	M-361		
Client's P/N:	/	PS Index:	04	PS Revision:	04
Subject:	CT Wandler				

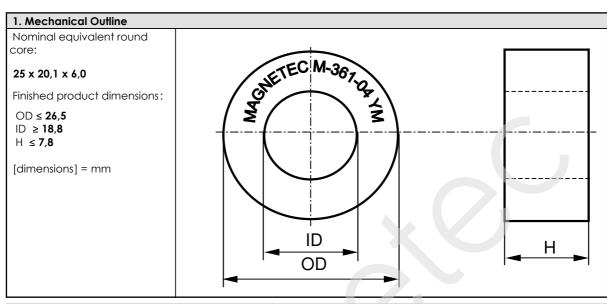

2. Core data (nominal values)				
Core material:	NANOPERM®	L <sub>Fe</sub> = <b>7,06</b> cm	$A_{Fe} = 0.11 \text{ cm}^2$	
Permeability level:		@ frequency	@ H peak	
	1.600	1 kHz	25 mA/cm	

3. Inspection values (at room temperature, unless otherwise stated)					
Measured value	Measurement limits	Frequency	leff x N [mA x turn]		
Al [nH]	294 - 333	1 kHz	125		

4. Core finishing					
Type:	Cased				
Marking:	MAGNETEC M-361-04 YM (YM = Production year/month)				
Packaging:	360 pcs. per layer; 2 layers per carton box; PU = 720 pcs.				

## 5. Comments 5 % measurement deviation has to be considered, Visit http://www.magnetec.de/fileadmin/pdf/pb\_ds.pdf for further information.

Index / Revision	Alteration	Date
03 / 01	Product Specification	13.03.2006
04 / 02	AL measurement	17.04.2007
04 / 03	Add one sentence to the comments	22.01.2019
04 / 04	Packaging modification	05.07.2022

Created:	Z. Kiss	Approved	D. Muhari	Approved		Released:	D. Tóth
	05.07.2022	(Techn):	07.07.2022	(Quality):	23.08.2022		09.12.2022

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent. Disclosing the specification to third parties or using its content without written permission from MAGNETEC is strictly forbidden and every offender is liable to pay the corresponding damages.