

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent.

Client:	MAGNETEC	Magnetec P/N:	M-449		
Client's P/N:		PS Index:	02	PS Revision:	04
Subject:	EMC Wandler				

1. Mechanical Outline

Nominal equivalent round core:

25 x 16 x 10


Finished product dimensions:

OD ≤ 28

ID ≥ 13

H ≤ 12,6

[dimensions] = mm

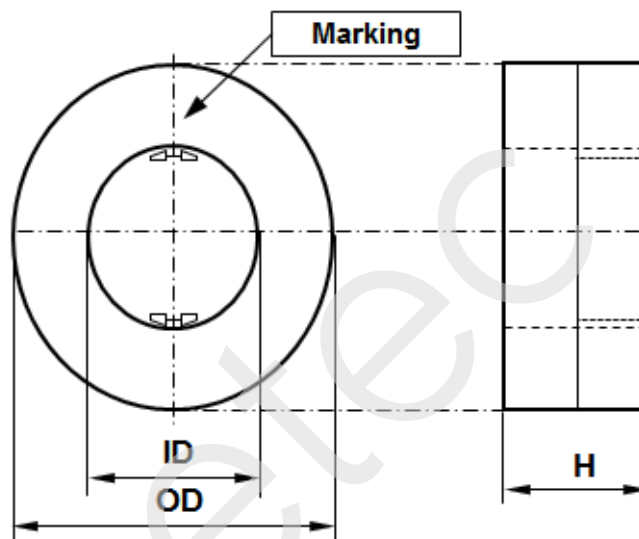

2. Core data (nominal values)

Core material:	NANOPERM®	$L_{Fe} = 6,34 \text{ cm}$	$A_{Fe} = 0,338 \text{ cm}^2$
Permeability level:	8 000	@ frequency 10 kHz	@ H peak 3 mA/cm

3. Inspection values (at room temperature, unless otherwise stated)

Measured value	Measurement limits	Frequency	$l_{eff} \times N$ [mA x turn]
AL [μH]	3,75 - 7,49	10 kHz	13,4
AL [μH]	3,19 - 6,37	100 kHz	13,4

4. Core finishing

Type:	Cased
Marking:	MAGNETEC M-449-02 YM (YM = Year/Month), acc. to IEC 60062 6.1.1
Packaging:	63 pcs. per layer; 6 layers per carton box; PU = 378 pcs.

5. Comments

Visit http://www.magnetec.de/fileadmin/pdf/pb_ds.pdf for further information.

Index / Revision	Alteration	Date
01 / 01	Product Specification	03.01.2008
01 / 02	AL limit and working point change	21.10.2010
02 / 03	Change to blue case	25.07.2016
02 / 04	Finished product dimensions corrected	24.11.2016

Created:	Z. Palánki	Approved (Techn):	F. Zámbořský	Approved (Quality):	L. Ferencz	Released:	P. Seiz
	24.11.2016		05.12.2016		05.12.2016		05.12.2016

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent. Disclosing the specification to third parties or using its content without written permission from MAGNETEC is strictly forbidden and every offender is liable to pay the corresponding damages.