

Product specification for inductive components

Form: MF04.05 (F108)
Revision: 01

Client:	MAGNETEC GmbH	Magnetec P/N:	M-473	Magnetec A/N:	12480
Client's P/N:	/	PS Index:	01	PS Revision:	01
Subject:	CT Wandler				

1. Mechanical Outline

Nominal equivalent round core:

36 x 24 x 15


Finished product dimensions:

OD \leq **38,0**

ID \geq **21,5**

H \leq **17,0**

[dimensions] = mm

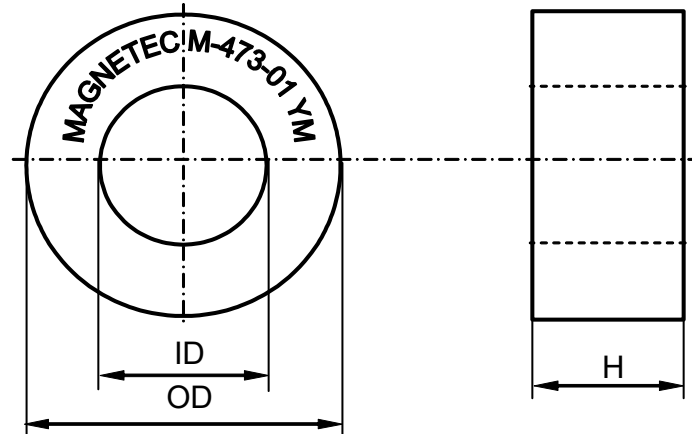

2. Core data (nominal values)

Core material:	NANOPERM®	$L_{Fe} = 9,23 \text{ cm}$	$A_{Fe} = 0,70 \text{ cm}^2$
Permeability level:	ca. 110.000	@ frequency 50 Hz	@ H peak 3,22 mA/cm

3. Inspection values (at room temperature, unless otherwise stated)

Measured value	Measurement limits	Frequency	$I_{eff} \times N$ [mA x turn]
AL [μH]	71 - NA	50 Hz	21

4. Core finishing

Type:	Epoxy coated
Marking:	MAGNETEC M-473-01 YM
Packaging:	24 pcs. per layer; 5 layers per carton box; PU = 120 pcs.

5. Comments

Visit http://www.magnetec.de/fileadmin/pdf/pb_ds.pdf for further information.

Index / Revision	Alteration	Date
01 / 01	Product Specification	11.05.2009

Created:	Zs. Sándor 11.05.2009	Approved (Techn):	F. Zámboorszky 12.05.2009	Approved (Quality):	V. Káposztas 13.05.2009	Released:	F. Rauscher 13.05.2009
-----------------	--------------------------	--------------------------	------------------------------	----------------------------	----------------------------	------------------	---------------------------

Disclosing the specification to third parties or using its content without written permission from MAGNETEC is strictly forbidden and every offender is liable to pay the corresponding damages