


Product specification for inductive components

Form: Revision: MF04.05 (F108)

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC 's prior written consent.

Client:	MAGNETEC GmbH	Magnetec P/N:	M-541		
Client's P/N:	/	PS Index:	01	PS Revision:	02
Subject:	EMC Wandler				

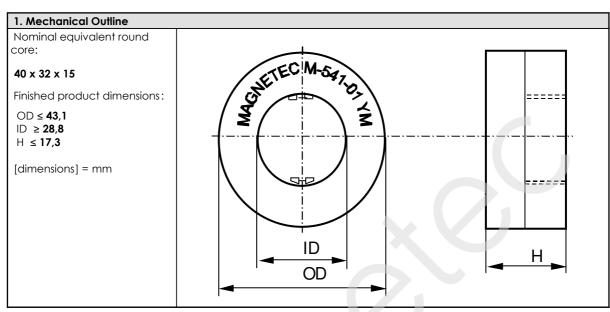

2. Core data (nominal values)					
Core material:	NANOPERM®	L _{Fe} = 11,26 cm	$A_{Fe} = 0.48 \text{ cm}^2$		
Permeability level:		@ frequency	@ H peak		
	~20.000	100 kHz	3,14 mA/cm		

3. Inspection values (at room temperature, unless otherwise stated)						
Measured value Measurement limits Frequency leff x N [mA						
AL [µH]	7,0 - 11,5	100 kHz	25			

4. Core finishing	
Type:	Cased and impregnated
Marking:	MAGNETEC M-541-01 YM
Packaging:	24 pcs. per layer; 5 layers per carton box; PU = 120 pcs.

5. Comments				
Visit http://www.m	nagnetec.de/fileadmir	n/pdf/pb ds.pdf	for further information.	

Index / Revision	Alteration	Date
018 / 01	Sample	12.09.2007
01 / 01	Product spezification	14.11.2007
01 / 02	Harmonization of part and finished product dimensions	15.01.2020

Created:	Z. Braxátor	Approved	F. Zámborszky	Approved	G. Zsák	Released:	B. Kessler
	15.01.2020	(Techn):	15.01.2020	(Quality):	15.01.2020		15.01.2020

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent. Disclosing the specification to third parties or using its content without written permission from MAGNETEC is strictly forbidden and every offender is liable to pay the corresponding damages.