


Product specification for inductive components

Form: Revision: MF04.05 (F108)

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC 's prior written consent.

Client:	Magnetec	Magnetec P/N:	M-934		
Client's P/N:	/	PS Index:	01	PS Revision:	01
Subject:	EMC Wandler				

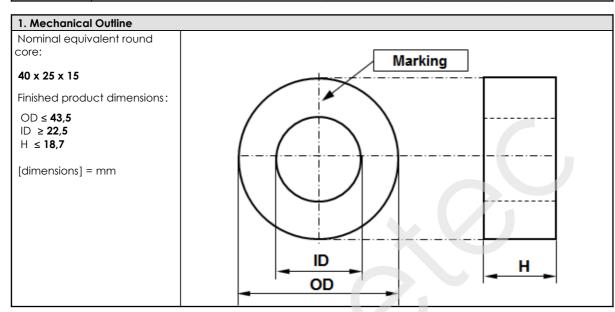

2. Core data (nominal values)					
Core material:	NANOPERM®	L _{Fe} = 10,0 cm	$A_{Fe} = 0.80 \text{ cm}^2$		
Permeability level:		@ frequency	@ H peak		
	5 000	10 kHz	3 mA/cm		

3. Inspection values (at room temperature, unless otherwise stated)						
Measured value	Measurement limits	Frequency	leff x N [mA x turn]			
AL [µH] AL [µH]	3,5 - 7,0 3,35 - NA	10 kHz 100 kHz	21 21			

AL [µn]		3,35 -	INA
4. Core finishing			

Cased

Type:

Marking: MAGNETEC M-934-01 YM (YM = Year/Month), acc. to IEC 60062 6.1.1

Packaging: 24 pcs. per layer; 4 layers per carton box; PU = 96 pcs.

5. Comments
Visit http://www.magnetec.de/fileadmin/pdf/pb ds.pdf for further information.

Index / Revision	Alteration	Date
01 / 01	First issue	17.03.2017

Created:	Z. Palánki	Approved	F. Zámborszky	Approved	G. Zsák	Released:	T. Trupp
	18.04.2017	(Techn):	27.04.2017	(Quality):	27.04.2017		27.04.2017

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent. Disclosing the specification to third parties or using its content without written permission from MAGNETEC is strictly forbidden and every offender is liable to pay the corresponding damages.