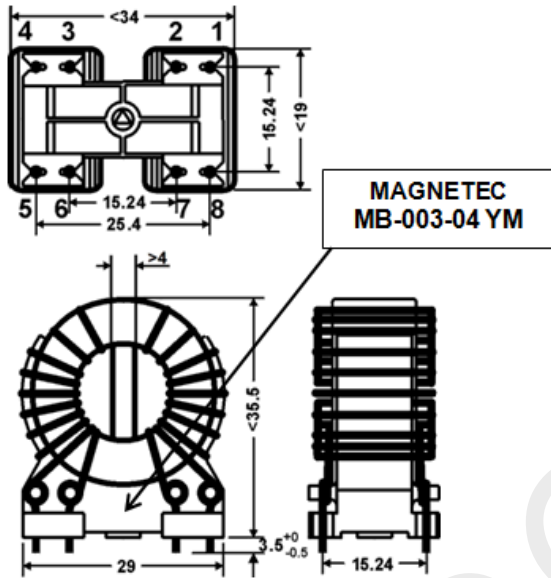



CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent.

Client:	MAGNETEC	Magnetec P/N:	MB-003		
Client's p/n:	/	PS Index:	04	PS Revision:	03
Subject:	EMC Component				

1. Mechanical outline	Wiring diagram
	
	

2. Nominal values			
Core material:	NANOPERM®	High voltage strength:	Up,eff = 2,5kV
Nominal voltage:	250 Veff AC	Ambient temperature:	-40 ... +60 °C
Nominal inductance:	2 x 12 mH	Max. operating temperature:	°C
Nominal current:	10 A	Storage temperature:	-40 ... +85 °C
Leakage inductances:	ca. 9 µH	Design standard:	EN 60938-1
No. of turns:	N1 = N2 = 14	Wire diameter:	0,8 mm
Comments:			

3. Inspection values (at room temperature, unless otherwise stated)			
Measured value	Measuring limits	Measuring configurations	
Inductivity L1; L2 [mH]	7,6 - 18,7	f = 10 kHz	Ieff = 1 mA
Wire resistance Rcu1; Rcu2 [mOhms]	0 - 12	RT = 25 °C	
HV strength between N1; N2 / Iiso<1mA	OK - NOK	Up,eff = 2,5 kV	t = 2 s
	-		
	-		

4. Others	
Marking:	MAGNETEC MB-003-04 YM (YM = Year/Month), acc. to IEC 62 5.1
Packaging:	30 pcs. per layer, 4 layers per carton box; PU = 120 pcs.
Comments:	Visit http://www.magnetec.de/fileadmin/pdf/pb_ds.pdf for further information.

Index / Rev.	Alteration	Date
04 / 00	Product Specification	04.09.2001
04 / 01	Spacer MT-019.03	29.09.2004
04 / 02	New format	08.05.2012
04 / 03	RCu limits corrected, picture and wiring diagram changed	15.08.2013

Created:	Z. Palánki	Approved (Techn):	F. Zámboreszky	Approved (Quality):	J. Gulyás	Released:	T. Trupp
	15.08.2013		09.09.2013		09.09.2013		09.09.2013

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent. Disclosing the specification to third parties or using its content without written permission from MAGNETEC is strictly forbidden and every offender is liable to pay the corresponding damages.