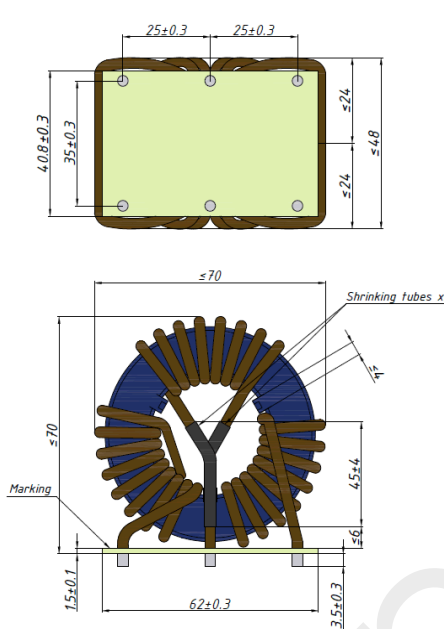
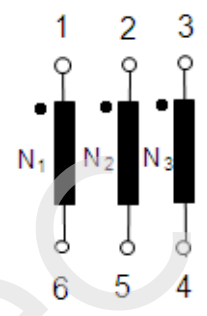


CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent.

Client:	Magnetec	Magnetec P/N:	MB-1367
Client's p/n:	MB-1367	PS Index:	01
Subject:	EMC Component	PS Revision:	01

1. Mechanical outline	Wiring diagram
 <p>Tolerance of pin distance: $\pm 0,3$ mm.</p>	

2. Nominal values			
Core material:	NANOPERM®	High voltage strength:	$U_{p,eff} = 2,7$ kV
Nominal voltage:	440 Veff AC	Ambient temperature:	-40 ... +60 °C
Nominal inductance:	3 x 2 mH	Max. operating temperature:	°C
Nominal current:	3 x 40* A	Storage temperature:	-40 ... +85 °C
Leakage inductances:	ca. 7 µH 100 kHz	Design standard:	EN 60938-1
No. of turns:	N1 = N2 = N3 = 9	Wire diameter:	3 mm
Comments:	*Forced air cooling assumed		

3. Inspection values (at room temperature, unless otherwise stated)			
Measured value	Measuring limits	Measuring configurations	
Inductivity L1; L2; L3 [mH]	1,2 - 2,8	f = 10 kHz	$U_{eff} = 100$ mV AC
Wire resistance Rcu1; Rcu2; Rcu3 [mOhms]	0 - 2,5	RT = 25°C	IDC = 10A
HV strength between N1; N2; N3 / Iiso<1mA	OK - NOK	$U_{p,eff} = 2,7$ kV	t = 2 s
	-		
	-		

4. Others	
Marking:	MAGNETEC MB-1367-01 YM (YM = Year/Month), acc. to IEC 60062 6.1.1
Packaging:	6 pcs. per layer, 4 layers per carton box; PU = 24 pcs.
Comments:	Visit http://www.magnetec.de/fileadmin/pdf/pb_ds.pdf for further information.

Index / Rev.	Alteration	Date
01 / 01	First revision	11.03.2021

Created:	Z. Braxátor	Approved (Techn):	A. Osipov	Approved (Quality):	V. Coceban	Released:	B. Kessler
	11.03.2021		12.07.2021		12.07.2021		15.07.2021

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent. Disclosing the specification to third parties or using its content without written permission from MAGNETEC is strictly forbidden and every offender is liable to pay the corresponding damages.