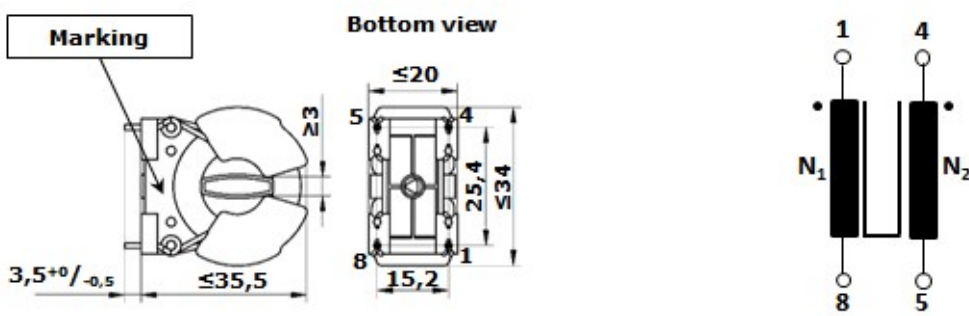


	Product specification for Inductive Components		Form:	MF04.07 (F190)
			Revision:	01

Client:	MAGNETEC	Magnetec P/N:	MB-639	Magnetec A/N:	12825
Client's p/n:	/	PS Index:	01	PS Revision:	02
Subject:	EMC Component				

1. Mechanical outline	Wiring diagram
	

2. Nominal values			
Core material:	NANOPERM®	High voltage strength:	$U_{p,eff} = 2,5 \text{ kV}$
Nominal voltage:	250 Veff AC	Ambient temperature:	$-40 \dots +60 \text{ }^\circ\text{C}$
Nominal inductance:	2 x 30 mH	Max. operating temperature:	$^\circ\text{C}$
Nominal current:	8,5 A	Storage temperature:	$-40 \dots +85 \text{ }^\circ\text{C}$
Leakage inductances:	$\sim 30 \text{ } \mu\text{H}$	Design standard:	EN 60938-1
No. of turns:	$N_1 = N_2 = 22$	Wire diameter:	1,12 mm
Comments:			

3. Inspection values (at room temperature, unless otherwise stated)			
Measured value	Measuring limits	Measuring configurations	
Inductivity L1; L2 [mH]	25 - 44	f = 10 kHz	$U_{eff} = 0,1 \text{ V}$
Inductivity L1; L2 [mH]	6,5 - 11,6	f = 100 kHz	$U_{eff} = 0,1 \text{ V}$
Wire resistance Rcu1; Rcu2 [mOhms]	0 - 20	T = $23 \pm 3 \text{ }^\circ\text{C}$	
HV strength between N1; N2	OK - NOK	$U_{eff} = 2,5 \text{ kV}$	t = 2 s
	-		

4. Others	
Marking:	MAGNETEC MB-639-01 YM (YM = Year/Month), acc. to IEC 60062 6.1.1
Packaging:	21 pcs. per layer, 4 layers per carton box; PU = 84 pcs.
Comments:	Visit http://www.magnetec.de/fileadmin/pdf/pb_ds.pdf for further information.

Index / Rev.	Alteration	Date
01 / 01	First issue	24.01.2017
01 / 02	Depth limit increase	24.05.2014

Created:	Z. Palánki 24.05.2014	Approved (Techn):	F. Záborszky 21.06.2017	Approved (Quality):	G. Zsák 21.06.2017	Released:	T. Trupp
----------	--------------------------	-------------------	----------------------------	---------------------	-----------------------	-----------	----------

Disclosing the specification to third parties or using its content without written permission from MAGNETEC is strictly forbidden and every offender is liable to pay the corresponding damages