


## Product specification for inductive components

Form: Revision: MF04.05 (F108)

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC 's prior written consent.

Client:	MAGNETEC	Magnetec P/N:	M-1286		
Client's P/N:	/	PS Index:	01	PS Revision:	01
Subject:	EMC Wandler				

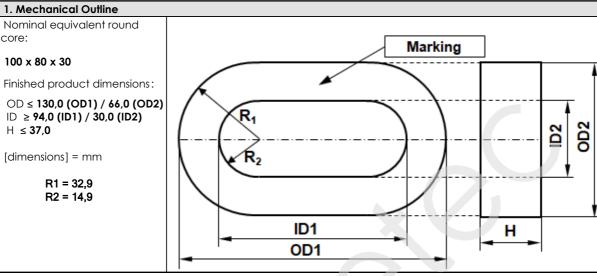

2. Core data (nominal values)				
Core material:	NANOPERM®	L <sub>Fe</sub> = <b>28</b> ,16 cm	$A_{Fe} = 2,25 \text{ cm}^2$	
Permeability level:		@ frequency	@ H peak	
	~ 30 000	10 kHz	3,0 mA/cm	

3. Inspection values (at room temperature, unless otherwise stated)					
Measured value	Measurement limits	Frequency	leff x N [mA x turn]		
AL [μH]	22,5 - 45,0	10 kHz	60		
AL [μH]	13.44 - NA	100 kHz	60		

4. Core finishing				
Type:	Glued into case			
Marking:	MAGNETEC M-1286-01 YM (YM = Year/Month), acc. to IEC 60062 6.1.1			
Packaging:	6 pcs. per layer; 2 layers per carton box; PU = 12 pcs.			

5. Comments
Visit <a href="http://www.magnetec.de/fileadmin/pdf/pb">http://www.magnetec.de/fileadmin/pdf/pb</a> ds.pdf for further information.

Index / Revision Alteration					Date			
01 / 01		Product S	Specification					05.04.2023
Created:	PI	Kárnáti	Approved	I Paikos	Approved	D. Parragi	Released:	R Kessler

30.05.2023.

(Techn):

05.04.2023

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent. Disclosing the specification to third parties or using its content without written permission from MAGNETEC is strictly forbidden and every offender is liable to pay the corresponding damages.

(Quality):

01.06.2023

12.06.2023