

FORM F 108
Revision: 05
Page: 1/1

Product specification
for inductive components

MAGNETEC GmbH
Industriestrasse 7
D-63505 Langenselbold

Client:	MAGNETEC	Magnetec P/N:	M-1284	Magnetec A/N:	12895
Client's P/N:	/	PS Index:	01	PS Revision:	01
Subject:	EMC Wandler				

1. Mechanical Outline

Nominal equivalent round core:

100 x 80 x 30

Finished product dimensions:

OD \leq 130,0 (OD1) / 66,0 (OD2)


ID \geq 94,0 (ID1) / 30,0 (ID2)

H \leq 37,0

[dimensions] = mm

R1 = 32,9

R2 = 14,9

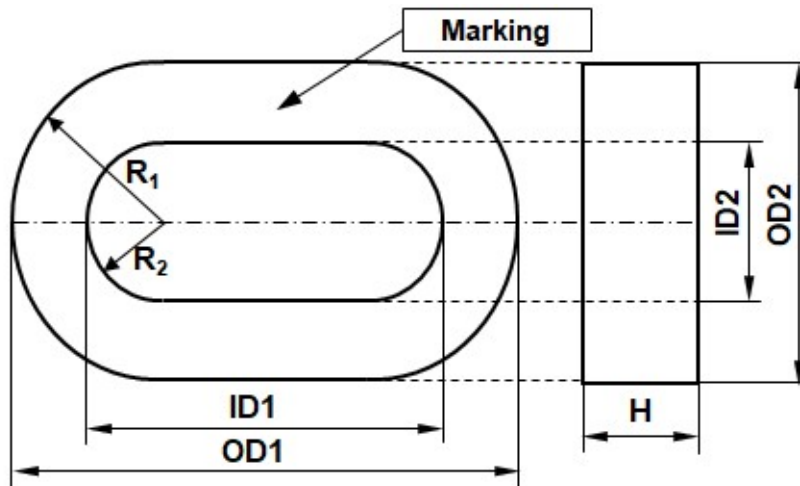

2. Core data (nominal values)

Core material:	NANOPERM®	$L_{Fe} = 28,16$ cm	$A_{Fe} = 2,25$ cm ²
Permeability level:	~ 4000	@ frequency 10 kHz	@ H peak 3,0 mA/cm

3. Inspection values (at room temperature, unless otherwise stated)

Measured value	Measurement limits	Frequency	leff x N [mA x turn]
AL [μ H]	2,81 - 5,62	10 kHz	60
AL [μ H]	2,81 - NA	100 kHz	60

4. Core finishing

Type:	Cased
Marking:	MAGNETEC M-1284-01 YM (YM = Year/Month), acc. to IEC 60062 6.1.1
Packaging:	6 pcs. per layer; 2 layers per carton box; PU = 12 pcs.

5. Comments

Visit http://www.magnetec.de/fileadmin/pdf/pb_ds.pdf for further information.

Index / Revision	Alteration	Date
01 / 01	First issue	11.04.2019

Created:	J. Tótk 11.04.2019	Approved (Techn):	F. Záborszky 03.05.2019	Approved (Quality):	G. Zsák 29.04.2019	Released:	B. Kessler 06.05.2019
----------	-----------------------	-------------------	----------------------------	---------------------	-----------------------	-----------	--------------------------

Disclosing the specification to third parties or using its content without written permission from MAGNETEC is strictly forbidden and every offender is liable to pay the corresponding damages