

FORM F 108
Revision: 05
Page: 1/1

Product specification
for inductive components

MAGNETEC GmbH
Industriestrasse 7
D-63505 Langenselbold

Client:	MAGNETEC	Magnetec P/N:	M-863	Magnetec A/N:	12823
Client's P/N:	/	PS Index:	01	PS Revision:	02
Subject:	EMC Wandler				

1. Mechanical Outline

Nominal equivalent round core:

300 x 250 x 30


Finished product dimensions:

OD \leq 392 (OD1)/160 (OD2)

ID \geq 326 (ID1)/ 93 (ID2)

H \leq 37

[dimensions] = mm

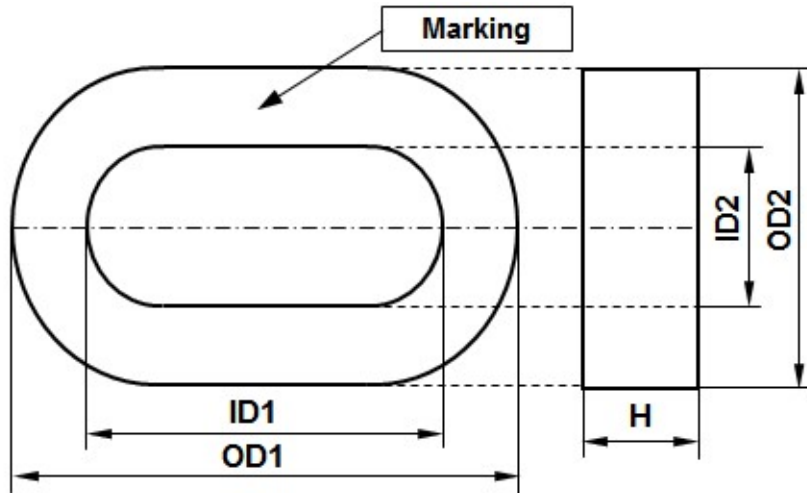

2. Core data (nominal values)

Core material:	NANOPERM®	$L_{Fe} = 86,03 \text{ cm}$	$A_{Fe} = 5,44 \text{ cm}^2$
Permeability level:	1 000	@ frequency 10 kHz	@ H peak 3 mA/cm

3. Inspection values (at room temperature, unless otherwise stated)

Measured value	Measurement limits	Frequency	leff x N [mA x turn]
AL [μ H]	0,56 - 1,11	10 kHz	183
AL [μ H]	0,56 - 1,11	100 kHz	183

4. Core finishing

Type:	Cased
Marking:	MAGNETEC M-863-01 YM (YM = Year/Month), acc. to IEC 60062 6.1.1
Packaging:	1 pcs. per layer; 5 layers per carton box; PU = 5 pcs.

5. Comments

Horizontal tape is blue, vertical one is clear. Visit http://www.magnetec.de/fileadmin/pdf/pb_ds.pdf for further information.

Index / Revision	Alteration	Date
01 / 01	First issue	02.11.2016
01 / 02	ID2 change from 94mm to 93mm	13.09.2019

Created:	J. Tótk 13.09.2019	Approved (Techn):	F. Záborszky 04.10.2019	Approved (Quality):	Sz. Ilcsik 03.10.2019	Released:	B. Kessler 11.10.2019
----------	-----------------------	-------------------	----------------------------	---------------------	--------------------------	-----------	--------------------------

Disclosing the specification to third parties or using its content without written permission from MAGNETEC is strictly forbidden and every offender is liable to pay the corresponding damages