

FORM F 108
Revision: 03
Page: 1/1

Product specification
for inductive components

MAGNETEC GmbH
Industriestrasse 7
D-63505 Langenselbold

Client:	MAGNETEC GmbH	Magnetec P/N:	M-529	Magnetec A/N:	12396
Client's P/N:	/	PS Index:	01	PS Revision:	02
Subject:	EMC WANDLER				

1. Mechanical Outline

Nominal equivalent round core:

160 x 130 x 10


Finished product dimensions:

OD \leq 165,0

ID \geq 123,0

H \leq 13,0

[dimensions] = mm

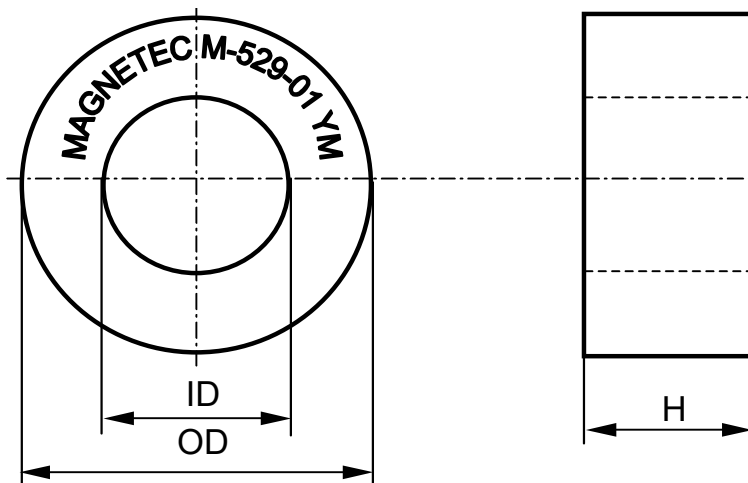

2. Core data (nominal values)

Core material:	NANOPERM®	$L_{Fe} = 44,71 \text{ cm}$	$A_{Fe} = 1,13 \text{ cm}^2$
Permeability level:	> 60.000	@ frequency 50 Hz	@ H peak 4 mA/cm

3. Inspection values (at room temperature, unless otherwise stated)

Measured value	Measurement limits	Frequency	leff x N [mA x turn]
AL [μ H]	19,0 - NA	50 Hz	126,0

4. Core finishing

Type:	Cased
Marking:	MAGNETEC M-529-01 YM
Packaging:	1 pcs. per layer; 11 layers per carton box; PU = 11 pcs.

5. Comments

Visit http://www.magnetec.de/fileadmin/pdf/pb_ds.pdf for further information.

Index / Revision	Alteration	Date
01 / 01	Product Specification	22.06.2007
01 / 02	PU = 11 pcs.	17.07.2007

Created:	Zs. Sándor 17.07.2007	Approved (Techn):	F. Záborszky 17.07.2007	Approved (Quality):	V. Káposztas 17.07.2007	Released:	F. Rauscher 17.07.2007
----------	--------------------------	----------------------	----------------------------	------------------------	----------------------------	-----------	---------------------------

Disclosing the specification to third parties or using its content without written permission from MAGNETEC is strictly forbidden and every offender is liable to pay the corresponding damages