

FORM F 108
Revision: 05
Page: 1/1

Product specification
for inductive components

MAGNETEC GmbH
Industriestrasse 7
D-63505 Langenselbold

Client:	MAGNETEC	Magnetec P/N:	M-024	Magnetec A/N:	12020
Client's P/N:	/	PS Index:	04	PS Revision:	01
Subject:	EMC Wandler				

1. Mechanical Outline

Nominal equivalent round core:

30 x 20 x 10


Finished product dimensions:

OD \leq 32,3

ID \geq 17,5

H \leq 12,3

[dimensions] = mm

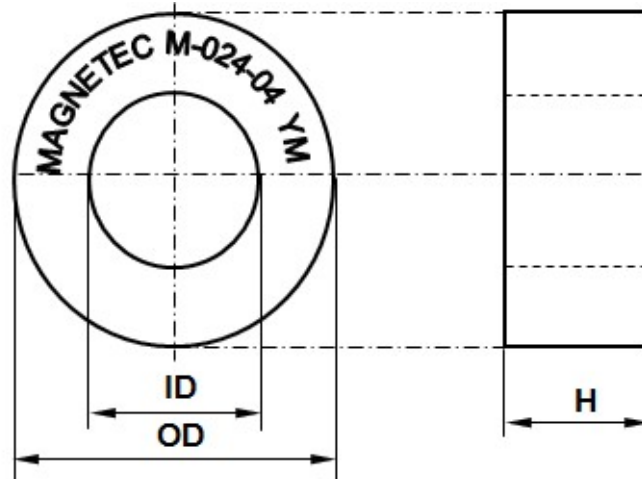

2. Core data (nominal values)

Core material:	NANOPERM®	$L_{Fe} = 7,75 \text{ cm}$	$A_{Fe} = 0,36 \text{ cm}^2$
Permeability level:	ca. 30.000	@ frequency 10 kHz	@ H peak 3,65 mA/cm

3. Inspection values (at room temperature, unless otherwise stated)

Measured value	Measurement limits	Frequency	leff x N [mA x turn]
AL [μ H]	13,6 - 27,2	10 kHz	20,0

4. Core finishing

Type:	Epoxy coated
Marking:	MAGNETEC M-024-04 YM (YM = Year/Month), acc. to IEC 62 5.1
Packaging:	35 pcs. per layer; 7 layers per carton box; PU = 245 pcs.

5. Comments

Visit http://www.magnetec.de/fileadmin/pdf/pb_ds.pdf for further information.

Index / Revision	Alteration	Date
04 / 00	Product Specification	21.07.2003
04 / 01	LN format, PU = 245 pcs.	22.02.2013

Created:	Z. Palánki 22.02.2013	Approved (Techn):	F. Záborszky 08.04.2013	Approved (Quality):	J. Gulyás 08.04.2013	Released:	F. Rauscher 08.04.2013
----------	--------------------------	-------------------	----------------------------	---------------------	-------------------------	-----------	---------------------------

Disclosing the specification to third parties or using its content without written permission from MAGNETEC is strictly forbidden and every offender is liable to pay the corresponding damages