

FORM F 108  
Revision: 05  
Page: 1/1

Product specification  
for inductive components

MAGNETEC GmbH  
Industriestrasse 7  
D-63505 Langenselbold

Client:	MAGNETEC	Magnetec P/N:	M-1508	Magnetec A/N:	12927
Client's P/N:	/	PS Index:	01	PS Revision:	02
Subject:	EMC Wandler				

1. Mechanical Outline

Nominal equivalent  
round core:

50 x 40 x 20

Finished product  
dimensions:

OD  $\leq$  60,7 (OD1) /


40,7 (OD2)

ID  $\geq$  42,7 (ID1) /

24,8 (ID2)

H  $\leq$  22,4

[dimensions] = mm

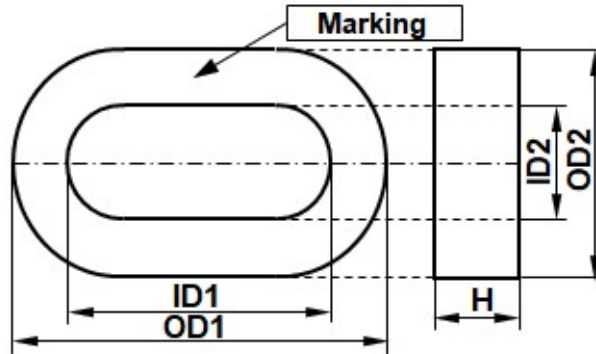

2. Core data (nominal values)

Core material:	NANOPERM®	$L_{Fe} = 14,0$ cm	$A_{Fe} = 0,67$ cm <sup>2</sup>
Permeability level:	8 000	@ frequency 10 kHz	@ H peak 3 mA/cm

3. Inspection values (at room temperature, unless otherwise stated)

Measured value	Measurement limits	Frequency	leff x N [mA x turn]
AL [ $\mu$ H]	3,7 - 7,4	10 kHz	30
AL [ $\mu$ H]	3,1 - NA	100 kHz	30

4. Core finishing

Type:	Cased
Marking:	MAGNETEC M-1508-01 YM (YM = Year/Month), acc. to IEC 60062:2004 6.1.1
Packaging:	15 pcs. per layer; 4 layers per carton box; PU = 60 pcs.

5. Comments

Visit [http://www.magnetec.de/fileadmin/pdf/pb\\_ds.pdf](http://www.magnetec.de/fileadmin/pdf/pb_ds.pdf) for further information.

Index / Revision	Alteration	Date
01 / 01	First issue	23.02.2020
01 / 02	Revision: marking standard	26.06.2020

Created:	Z. Palánki 26.06.2020	Approved (Techn):	F. Záborszky 03.07.2020	Approved (Quality):	Sz. Ilcsik 01.07.2020	Released:	M. Hoentsch 07.07.2020
----------	--------------------------	----------------------	----------------------------	------------------------	--------------------------	-----------	---------------------------

Disclosing the specification to third parties or using its content without written permission from MAGNETEC is strictly forbidden and every offender is liable to pay the corresponding damages