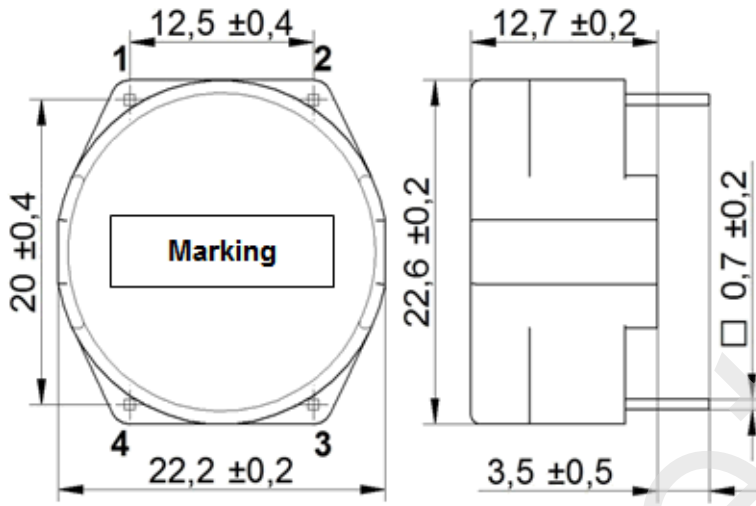



CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent.

Client:	MAGNETEC	Magnetec P/N:	MB-618		
Client's p/n:	/	PS Index:	01	PS Revision:	03
Subject:	EMC Component				

1. Mechanical outline	Wiring diagram
 <p>Minimal creepage distance is 3 mm, minimal clearance distance is 2,5 mm.</p>	

2. Nominal values			
Core material:	NANOPERM®	High voltage strength:	Up,eff = 2,5 kV
Nominal voltage:	250 Veff AC	Ambient temperature:	-40 ... +70 °C
Nominal inductance:	2 x 5 mH	Max. operating temperature:	°C
Nominal current:	4,5 A	Storage temperature:	-40 ... +85 °C
Leakage inductances:	ca. 5 µH	Design standard:	EN 60938-1
No. of turns:	N1 = N2 = 12	Wire diameter:	0,63 mm
Comments:			

3. Inspection values (at room temperature, unless otherwise stated)			
Measured value	Measuring limits	Measuring configurations	
Inductivity L1; L2 [mH]	3,32 - 7,40	f = 10 kHz	Ueff = 0,1 V
Inductivity L1; L2 [mH]	1,05 - NA	f = 100 kHz	Ueff = 0,1 V
Wire resistance Rcu1; Rcu2 [mOhms]	0 - 23	T = 23±3°C	t = 2 s
HV strength between N1; N2 / liso<1mA	OK - NOK	Ueff = 2,5 kV	
	-		

4. Others	
Marking:	MAGNETEC MB-618-01 YM (YM = Year/Month), acc. to IEC 60062 6.1.1
Packaging:	60 pcs. per layer, 5 layers per carton box; PU = 300 pcs.
Comments:	Visit http://www.magnetec.de/fileadmin/pdf/pb_ds.pdf for further information.

Index / Rev.	Alteration	Date
01 / 01	First issue	16.06.2015
01 / 02	Minimal creepage and clearance distance given on the datasheet	09.07.2015
01 / 03	New Corporate Identity	16.07.2021

Created:	E. Celan	Approved (Techn):	A. Osipov	Approved (Quality):	V. Coceban	Released:	B. Kessler
	16.07.2021		16.07.2021		02.11.2021		10.12.2021

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent. Disclosing the specification to third parties or using its content without written permission from MAGNETEC is strictly forbidden and every offender is liable to pay the corresponding damages.