

FORM
Identifier: F 108
Revision: 04
Page: 1/1

Product specification
for inductive components

MAGNETEC GmbH
Industriestrasse 7
D-63505 Langenselbold



Client:	MAGNETEC	Magnetec P/N:	M-112	Magnetec A/N:	12139
Client's P/N:		PS Index:	02	PS Revision:	04
Subject:	EMC Wandler			Type:	E

1. Mechanical Outline

Nominal core dimensions:

63 x 50 x 30


Finished product dimensions:

OD ≤ 68,0

ID ≥ 43,0

H ≤ 36,0

[dimensions] = mm

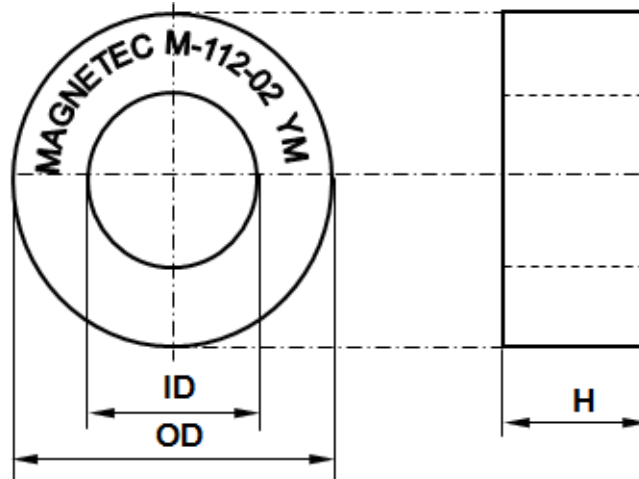

2. Core data (nominal values)

Core material:	NANOPERM®	$L_{Fe} = 17,67 \text{ cm}$	$A_{Fe} = 1,44 \text{ cm}^2$
Permeability level:	ca. 30 000	@ frequency 10 kHz	@ H peak 3,2 mA/cm

3. Inspection values

	Measured value	Measurement limits	Frequency	leff x N [mA x turn]
AL [μH]		23,3 - 46,6	10 kHz	40,0
AL [μH]		11,0 - NA	100 kHz	40,0

4. Core finishing

Type:	cased
Marking:	MAGNETEC M-112-02 YM (YM = Year/Month), acc. to IEC 62 5.1
Packaging:	8 pcs. per layer; 2 layers per carton box; PU = 16 pcs.

5. Comments:



Index / Revision	Alteration	Date
02 / 01	Product specification; Moulded case	15.06.2005
02 / 02	PU = 30 pcs	23.06.2005
02 / 03	New format; PU = 16 pcs	23.05.2007
02 / 04	100 kHz lower limit added, marking line modified	16.10.2013

Created:	Z. Palánki	Approved (Techn):	F. Záborszky	Approved (Quality):	J. Gulyás	Released:	T. Trupp
	16.10.2013		17.10.2013		17.10.2013		17.10.2013