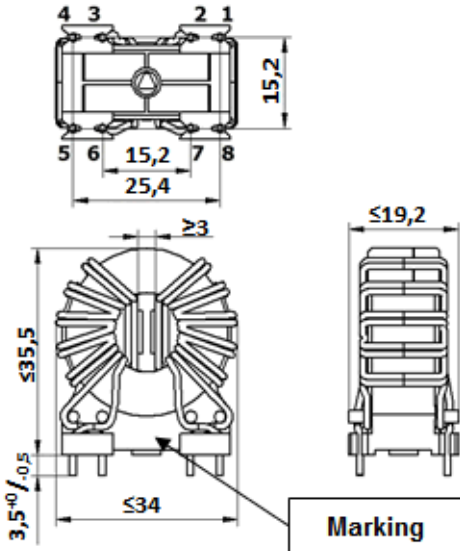
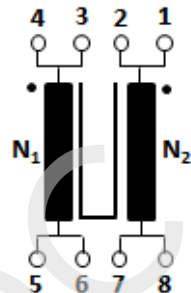


CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent.

Client:	MAGNETEC	Magnetec P/N:	MB-605		
Client's p/n:	/	PS Index:	01	PS Revision:	01
Subject:	EMC Component				

1. Mechanical outline	Wiring diagram
	
	

2. Nominal values			
Core material:	NANOPERM®	High voltage strength:	Up,eff = 2,5 kV
Nominal voltage:	250 Veff AC	Ambient temperature:	-40 ... +70 °C
Nominal inductance:	2 x 3 mH	Max. operating temperature:	°C
Nominal current:	18 A	Storage temperature:	-40 ... +85 °C
Leakage inductances:	ca. 5 µH	Design standard:	EN 60938-1
No. of turns:	N1 = N2 = 7	Wire diameter:	2x 1 mm
Comments:			

3. Inspection values (at room temperature, unless otherwise stated)			
Measured value	Measuring limits	Measuring configurations	
Inductivity L1; L2 [mH]	1,96 - 4,36	f = 10 kHz	Ueff = 0,1 V
Inductivity L1; L2 [mH]	0,64 - NA	f = 100 kHz	Ueff = 0,1 V
Wire resistance Rcu1; Rcu2 [mOhms]	0 - 4	T = 23±3°C	t = 2 s
HV strength between N1; N2 / Iiso<1mA	OK - NOK	Ueff = 2,5 kV	
	-		

4. Others	
Marking:	MAGNETEC MB-605-01 YM (YM = Year/Month), acc. to IEC 60062 6.1.1
Packaging:	30 pcs. per layer, 4 layers per carton box; PU = 120 pcs.
Comments:	Visit <a href="http://www.magnetec.de/fileadmin/pdf/pb_ds.pdf">http://www.magnetec.de/fileadmin/pdf/pb_ds.pdf</a> for further information.

Index / Rev.	Alteration	Date
01 / 01	First issue	12.05.2015

Created:	Z. Palánki	Approved (Techn):	F. Zámboreszky	Approved (Quality):	J. Gulyás	Released:	T. Trupp
	12.05.2015		10.06.2015		10.06.2015		10.06.2015

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent. Disclosing the specification to third parties or using its content without written permission from MAGNETEC is strictly forbidden and every offender is liable to pay the corresponding damages.