

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent.

Client:	MAGNETEC	Magnetec P/N:	M-925		
Client's P/N:	/	PS Index:	01	PS Revision:	04
Subject:	EMC Wandler				

1. Mechanical Outline

Nominal equivalent round core:

16 x 10 x 6


Finished product dimensions:

OD ≤ 18,0

ID ≥ 8,0

H ≤ 8,2

[dimensions] = mm

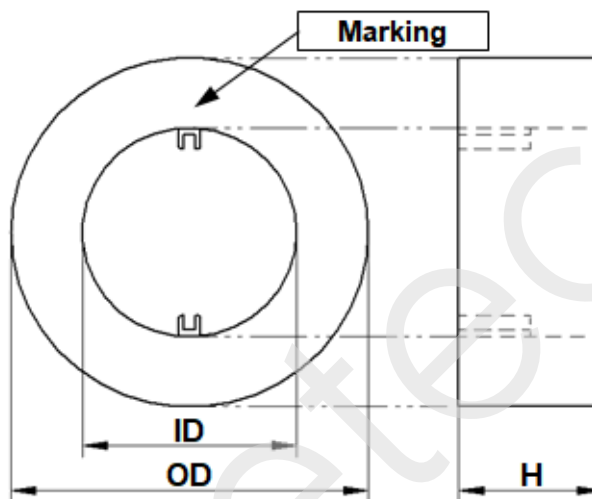

2. Core data (nominal values)

Core material:

NANOPERM®

$L_{Fe} = 4,0 \text{ cm}$

$A_{Fe} = 0,12 \text{ cm}^2$

Permeability level:

ca. 30 000

@ frequency

10 kHz

@ H peak

3,5 mA/cm

3. Inspection values (at room temperature, unless otherwise stated)

Measured value	Measurement limits	Frequency	$l_{eff} \times N$ [mA x turn]
AL [μH]	9,5 - 19,0	10 kHz	10
AL [μH]	4,5 - NA	100 kHz	10

4. Core finishing

Type:

Cased

Marking:

MAGNETEC M-925-01 YM (YM = Year/Month), acc. to IEC 60062 6.1.1

Packaging:

110 pcs. per layer; 9 layers per carton box; PU = 990 pcs.

5. Comments

Visit http://www.magnetec.de/fileadmin/pdf/pb_ds.pdf for further information.

Index / Revision	Alteration	Date
01 / 01	First issue	21.10.2014
02 / 02	Case change	01.09.2016
01 / 03	Case change back to brown	07.10.2016
01 / 04	Drawing correction	03.07.2017

Created:	Z. Palánki 03.07.2017	Approved (Techn):	F. Zámbořský 05.07.2017	Approved (Quality):	G. Zsák 05.07.2017	Released:	T. Trupp 05.07.2017
----------	--------------------------	-------------------	----------------------------	---------------------	-----------------------	-----------	------------------------

CONFIDENTIAL - Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein is prohibited without MAGNETEC's prior written consent. Disclosing the specification to third parties or using its content without written permission from MAGNETEC is strictly forbidden and every offender is liable to pay the corresponding damages.