


<b>FORM</b> Identifier: F 190 Revision: 02 Page: 1/1	<b>Product specification          for Inductive Components</b>	<b>MAGNETEC GmbH</b> Industriestrasse 7 D-63505 Langenselbold
---	--	---

<b>Client:</b>	<b>MAGNETEC</b>	<b>Magnetec P/N:</b>	<b>MB-696</b>	<b>Magnetec A/N:</b>	<b>12827</b>
<b>Client's p/n:</b>	/	<b>PS Index:</b>	<b>01</b>	<b>PS Revision:</b>	<b>01</b>
<b>Subject:</b>	<b>EMC Component</b>			<b>Type:</b>	

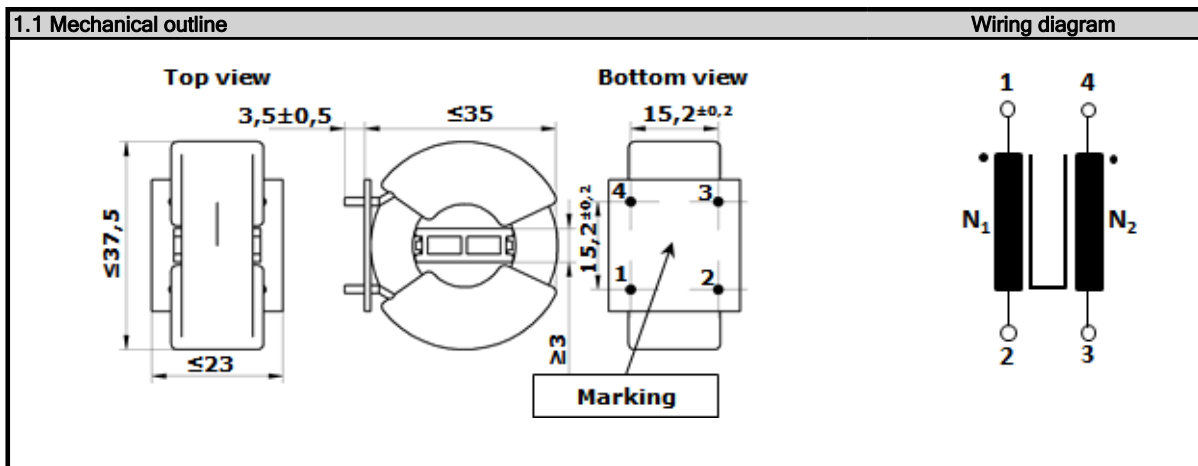

<b>2. Nominal values</b>			
Core material:	NANOPERM®	Wire Resistance:	≤ 12 mOhms
Nominal voltage:	250 Veff AC	High voltage strength:	Up,eff = 2,5 kV
Nominal inductance:	2 x 7 mH	Operating temperature:	-40 ... +70 °C
Nominal current:	10 A	Storage temperature:	-40 ... +85 °C
Leakage inductances:	~23 µH	Design standard:	EN 60938-1
No. of turns:	N1 = N2 = 20	Wire diameter:	1,4 mm
Comments:			

<b>3. Inspection values</b>			
	Measured value	Measuring limits	Measuring configurations
	Inductivity L 1; L2 [mH]	4,6 - 10,3	f = 10 kHz Ueff = 0,1 V
	Inductivity L 1; L2 [mH]	3,1 - NA	f = 100 kHz Ueff = 0,1 V
	Wire resistance Rcu 1; Rcu2 [mOhms]	0 - 12	T = 23±3 °C
	HV strength between N 1; N2	OK - NOK	Ueff = 2,5 kV t = 2 s
		-	

<b>4. Others</b>	
	Marking: <b>MAGNETEC MB-696-01 YM (YM = Year/Month), acc. to IEC 60062 6.1.1</b> Packaging: <b>24 pcs. per layer, 4 layers per carton box ; PU = 96 pcs.</b> Comments:

Index / Rev.	Alteration	Date
01 / 01	First issue	15.02.2017

<b>Created:</b>	Z. Palánki	<b>Approved (Techn):</b>	F. Záborszky	<b>Approved (Quality):</b>	G. Zsák	<b>Released:</b>	T. Trupp
	15.02.2017		06.04.2017		06.04.2017		07.04.2017